


Professional hardware manufacturer

Guangdong Goodich Hardware Co.ltd

Stronger | Faster | Better | Cheaper



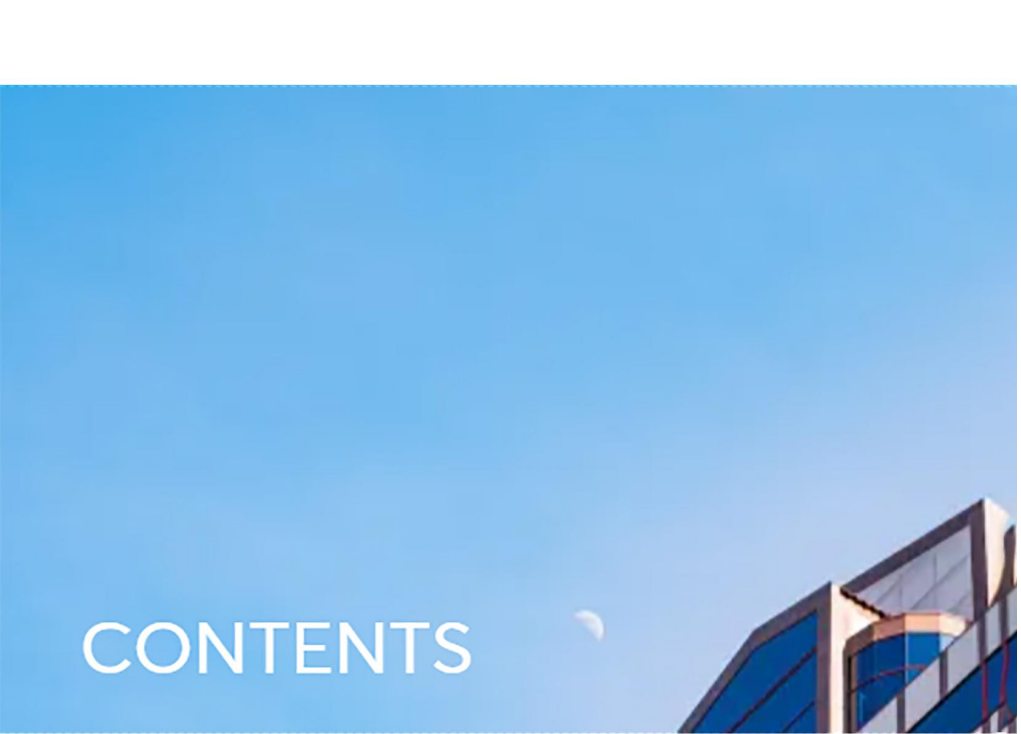


CONTENTS

03 Company Profile

04 Industrial Caster
^

18 Furniture Wheel
^

21 Medical Wheel
^

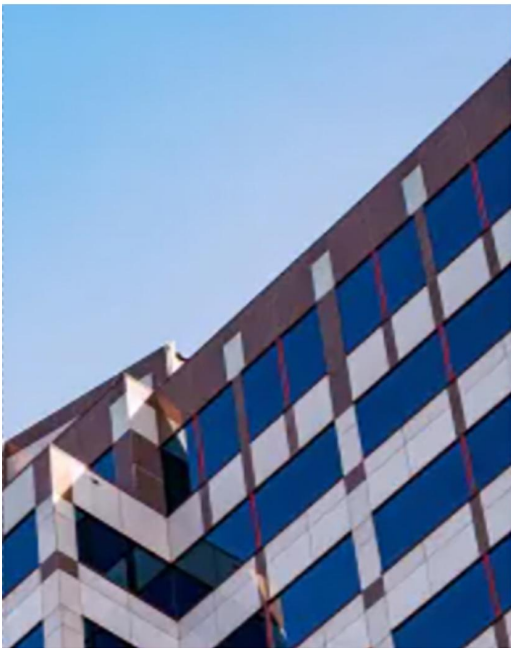

COMPANY INTRODUCTION

Welcome to our company profile! We are a caster wheel company established in 2016, focusing on the production of casters and slide rails, with a factory of 8000 square meters and nearly 100 employees.

Our company has a professional R&D team and a high-quality production team, committed to providing customers with high-quality, high-performance casters. Our products are widely used in furniture, office equipment, medical equipment, logistics equipment and other industries.

We always adhere to customer needs as the guide, and constantly optimize and innovate products to meet the needs of customers in different fields, different sizes, and different requirements. Our product quality has been recognized and trusted by our customers, and we have become a partner of well-known brands at home and abroad.





中型双轴工业脚轮

Medium Duty Double Ball Bearing industry Caster



单轮选配

Caster Combination



PBO1



PVBO82



TPRJD96



TPRJD96



RJD88



支架表面处理

Surface Coating



E



Z



S



G



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-F23Z-PBO1-6001	PP	75(3")	33	105	36	93x62	72X45	8.5	80
	M04-F23Z-PBO1-6001	PP	100(4")	33	130	35	93X62	72X45	8.5	100
	M05-F23Z-PBO1-6001	PP	125(5")	33	158	34.5	93X62	72X45	8.5	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FS23Z-PBO1-6001	PP	75(3")	33	105	36	93x62	72X45	8.5	80
	M04-FS23Z-PBO1-6001	PP	100(4")	33	130	35	93X62	72X45	8.5	100
	M05-FS23Z-PBO1-6001	PP	125(5")	33	158	34.5	93X62	72X45	8.5	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FDB23Z-PBO1-6001	PP	75(3")	33	105	36	93x62	72X45	8.5	80
	M04-FDB23Z-PBO1-6001	PP	100(4")	33	130	35	93X62	72X45	8.5	100
	M05-FDB23Z-PBO1-6001	PP	125(5")	33	158	34.5	93X62	72X45	8.5	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LS23Z-PBO1-6001-M12*30	PP	75(3")	33	105	36	M12x30	80
	M04-LS23Z-PBO1-6001-M12*30	PP	100(4")	33	130	35	M12x30	100
	M05-LS23Z-PBO1-6001-M12*30	PP	125(5")	33	158	34.5	M12x30	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LDB23Z-PBO1-6001-M12*30	PP	75(3")	33	105	36	M12x30	80
	M04-LDB23Z-PBO1-6001-M12*30	PP	100(4")	33	130	35	M12x30	100
	M05-LDB23Z-PBO1-6001-M12*30	PP	125(5")	33	158	34.5	M12x30	110



中轻型金钻双轴脚轮 Mid/Light Duty Double Ball Bearing Caster



单轮选配
Caster Combination



PVBO19



PVBO94



PVBO12



PBO1



PTRB88



支架表面处理
Surface Coating



E
电泳



Z
镀锌



S
喷粉



G
硬铬



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
J015-F12E-PVBO19-608		PVC	40(1.5")	21	62	20.5	60x44	45X30	6.5	60
J02-F18E-PVBO19-608		PVC	50(2")	25	72	20	70X51	52X35	8.5	70
J025-F23E-PVBO19-6001		PVC	63(2.5")	32	92	35	93X62	72X45	9	80



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
J015-FS12E-PVBO19-608		PVC	40(1.5")	21	62	20.5	60x44	45X30	6.5	60
J02-FS18E-PVBO19-608		PVC	50(2")	25	72	20	70X51	52X35	8.5	70
J025-FS23E-PVBO19-6001		PVC	63(2.5")	32	92	35	93X62	72X45	9	80



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
J015-FDB12E-PVBO19-608		PVC	40(1.5")	21	62	20.5	60x44	45X30	6.5	60
J02-FDB18E-PVBO19-608		PVC	50(2")	25	72	20	70X51	52X35	8.5	70
J025-FDB23E-PVBO19-6001		PVC	63(2.5")	32	92	35	93X62	72X45	9	80



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
J015-LS12E-PVBO19-608-M8*25		PVC	40(1.5")	21	62	20.5	M8/10x10/15	60
J02-LS18E-PVBO19-608-M8*25		PVC	50(2")	25	72	20	M10x10/20/30	70
J025-LS23E-PVBO19-6001-M12*30		PVC	63(2.5")	32	92	35	M12/16x30	80



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
J015-LDB12E-PVBO19-608-M8*25		PVC	40(1.5")	21	62	20.5	M8/10x10/15	60
J02-LDB18E-PVBO19-608-M8*25		PVC	50(2")	25	72	20	M10x10/20/30	70
J025-LDB23E-PVBO19-6001-M12*30		PVC	63(2.5")	32	92	35	M12/16x30	80



轻型PVC脚轮 Light Duty PVC Caster



单轮选配
Caster Combination



PVS12



PVS19



PVS16



支架表面处理
Surface Coating



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-F12Z-PVS12-MD	PVC	38(1.5")	17	50	16	45X38	38X27	5	20
L02-F12Z-PVS12-MD	PVC	50(2")	22	65.5	19	58X46	45X34	6	35
L025-F12Z-PVS12-MD	PVC	63(2.5")	25	80	24	70X58	55X42	8	45
L03-F12Z-PVS12-MD	PVC	75(3")	25	99	30	70X58	55X42	8	50

NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-FS12Z-PVS12-MD	PVC	38(1.5")	17	50	16	45X38	38X27	5	20
L02-FS12Z-PVS12-MD	PVC	50(2")	22	65.5	19	58X46	45X34	6	35
L025-FS18Z-PVS12-MD	PVC	63(2.5")	25	80	24	70X58	55X42	8	45
L03-FS18Z-PVS12-MD	PVC	75(3")	25	99	30	70X58	55X42	8	50

NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-FDB12Z-PVS12-MD	PVC	38(1.5")	17	50	16	45X38	38X27	5	20
L02-FDB12Z-PVS12-MD	PVC	50(2")	22	65.5	19	58X46	45X34	6	35
L025-FDB18Z-PVS12-MD	PVC	63(2.5")	25	80	24	70X58	55X42	8	45
L03-FDB18Z-PVS12-MD	PVC	75(3")	25	99	30	70X58	55X42	8	50

NO.								
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)	
L015-LS12Z-PVS12-MD-M8*25	PVC	38(1.5")	17	51	16	M8X25	20	
L02-LS15Z-PVS12-MD-M8*25	PVC	50(2)	22	65	19	M8X25	35	
L025-LS18Z-PVS12-MD-M12*30	PVC	63(2.5")	25	80	24	M8X25	40	
L03-LS18Z-PVS12-6001-M12*30	PVC	75(3")	25	99	30	M8X25	50	

							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
L015-LDB12Z-PVS12-MD-M8*25	PVC	38(1.5")	17	51	16	M8X25	20
L02-LDB15Z-PVS12-MD-M8*25	PVC	50(2")	22	65	19	M8X25	35
L025-LDB18Z-PVS12-MD-M12*30	PVC	63(2.5")	25	80	24	M8X25	40
L03-LDB18Z-PVS12-MD-M12*30	PVC	75(3")	25	99	30	M8X25	50



轻型PP脚轮 Light Duty PP Caster



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-F12Z-P1-MD	PP	38(1.5")	17	50	16	45X38	38X27	5.2	20
L02-F12Z-P1-MD	PP	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
L025-F12Z-P1-MD	PP	63(2.5")	25	80	24	70X58	55X42	8.4	45
L03-F12Z-P1-MD	PP	75(3")	25	99	30	70X58	55X42	8.4	50



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-FS12Z-P1-MD	PP	38(1.5")	17	50	16	45X38	38X27	5.2	20
L02-FS15Z-P1-MD	PP	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
L025-FS18Z-P1-MD	PP	63(2.5")	25	80	24	70X58	55X42	8.4	45
L03-FS18Z-P1-MD	PP	75(3")	25	99	30	70X58	55X42	8.4	50



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-FDB12Z-P1-MD	PP	38(1.5")	17	50	16	45X38	38X27	5.2	20
L02-FDB15Z-P1-MD	PP	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
L025-FDB18Z-P1-MD	PP	63(2.5")	25	80	24	70X58	55X42	8.4	45
L03-FDB18Z-P1-MD	PP	75(3")	25	99	30	70X58	55X42	8.4	50



NO.							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
L015-LS12Z-P1-MD-M8*25	PP	38(1.5")	17	50	16	M8X25	20
L02-LS15Z-P1-MD-M8*25	PP	50(2")	22	65.5	19	M8X25	35
L025-LS18Z-P1-MD-M12*30	PP	63(2.5")	25	80	24	M12X30	40
L03-LS18Z-P1-MD-M12*30	PP	75(3")	25	99	30	M12X30	50



NO.							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
L015-LDB12Z-P1-MD-M8*25	PP	38(1.5")	17	50	16	M8X25	20
L02-LDB15Z-P1-MD-M8*25	PP	50(2")	22	65.5	19	M8X25	35
L025-LDB18Z-P1-MD-M12*30	PP	63(2.5")	25	80	24	M12X30	40
L03-LDB18Z-P1-MD-M12*30	PP	75(3")	25	99	30	M12X30	50



轻型软/硬橡胶轮 Light Duty Soft/Hard Rubber Caster



单轮选配

Caster Combination



R9



支架表面处理

Surface Coating



E

电床



Z

镀锌



									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 总高度 (mm)	Swivel Radius 旋转半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-F12Z-R9-MD	SR/HR	38(1.5")	17	50	16	45X38	38X27	5.2	20
L02-F12Z-R9-MD	SR/HR	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
L025-F12Z-R9-MD	SR/HR	63(2.5")	25	80	24	70X58	55X42	8.4	45
L03-F12Z-R9-MD	SR/HR	75(3")	25	99	30	70X58	55X42	8.4	50



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-FS12Z-R9-MD	SR/HR	38(1.5")	17	50	16	45X38	38X27	5.2	20
L02-FS15Z-R9-MD	SR/HR	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
L025-FS18Z-R9-MD	SR/HR	63(2.5")	25	80	24	70X58	55X42	8.4	45
L03-FS18Z-R9-MD	SR/HR	75(3")	25	99	30	70X58	55X42	8.4	50



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
L015-FDB12Z-R9-MD	SR/HR	38(1.5")	17	50	16	45X38	38X27	5.2	20
L02-FDB18Z-R9-MD	SR/HR	50(2")	22	65.5	19	59X47	46X34.5	6.4	35
L025-FDB18Z-R9-MD	SR/HR	63(2.5")	25	80	24	70X58	55X42	8.4	45
L03-FDB18Z-R9-MD	SR/HR	75(3")	25	99	30	70X58	55X42	8.4	50



							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
L015-LS12Z-R9-MD-M8*25	SR/HR	38(1.5")	17	50	16	M8X25	20
L02-LS15Z-R9-MD-M8*25	SR/HR	50(2")	22	65.5	19	M8X25	35
L025-LS18Z-R9-MD-M12*30	SR/HR	63(2.5")	25	80	24	M12X30	40
L03-LS18Z-R9-MD-M12*30	SR/HR	75(3")	25	99	30	M12X30	50



							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
L015-LDB12Z-R9-MD-M8*25	SR/HR	38(1.5")	17	50	16	M8X25	20
L02-LDB15Z-R9-MD-M8*25	SR/HR	50(2")	22	65.5	19	M8X25	35
L025-LDB18Z-R9-MD-M12*30	SR/HR	63(2.5")	25	80	24	M12X30	40
L03-LDB18Z-R9-MD-M12*30	SR/HR	75(3")	25	99	30	M12X30	50



中型双轴通花脚轮 Medium Duty Double Ball Bearing Caster



单轮选配

Caster Combination



支架表面处理

Surface Coating



PVBOH94



PVBOH9




PVBOH19



PVBOH12



PVBOH88



E



Z



S



G



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-F23Z-PVBOH94-6001	PVC	75(3")	33	105	36	93x62	72X45	8.5	80
	M04-F23Z-PVBOH94-6001	PVC	100(4")	33	130	35	93X62	72X45	8.5	100
	M05-F23Z-PVBOH94-6001	PVC	125(5")	33	158	34.5	93X62	72X45	8.5	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FS23Z-PVBOH94-6001	PVC	75(3")	33	105	36	93x62	72X45	8.5	80
	M04-FS23Z-PVBOH94-6001	PVC	100(4")	33	130	35	93X62	72X45	8.5	100
	M05-FS23Z-PVBOH94-6001	PVC	125(5")	33	158	34.5	93X62	72X45	8.5	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FDB23Z-PVBOH94-6001	PVC	75(3")	33	105	36	93x62	72X45	8.5	80
	M04-FDB23Z-PVBOH94-6001	PVC	100(4")	33	130	35	93X62	72X45	8.5	100
	M05-FDB23Z-PVBOH94-6001	PVC	125(5")	33	158	34.5	93X62	72X45	8.5	110



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LS23Z-PVBOH94-6001-M12*30	PVC	75(3")	33	105	36	M12x30	80
	M04-LS23Z-PVBOH94-6001-M12*30	PVC	100(4")	33	130	35	M12x30	100
	M05-LS23Z-PVBOH94-6001-M12*30	PVC	125(5")	33	158	34.5	M12x30	110



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LDB23Z-PVBOH94-6001-M12*30	PVC	75(3")	33	105	36	M12x30	80
	M04-LDB23Z-PVBOH94-6001-M12*30	PVC	100(4")	33	130	35	M12x30	100
	M05-LDB23Z-PVBOH94-6001-M12*30	PVC	125(5")	33	158	34.5	M12x30	110



双轴班椅透明轮 Double Ball Bearing Transparent Caster



CUBO80



CUBO90



CUBO90



CUBO50



CUBO30



E
电泳



Z
镀锌



S
喷粉



G
镀金



NO.

Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
T025-LS23Z-CU90-6001-M12*30	PU+PC	65(2.5")	24	82	25	M12x30	45
T03-LS23Z-CU90-6001-M12*30	PU+PC	75(3")	24	95	30	M12x30	50



NO.

Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
T025-LDB23Z-CU90-6001-M12*30	PU+PC	65(2.5")	24	82	25	M12x30	45
T03-LDB23Z-CU90-6001-M12*30	PU+PC	75(3")	24	95	30	M12x30	50



NO.

Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Ring Stem 卡簧尺寸 (mm)	Load Capacity 承重 (kg)
T025-PS23Z-CU90-6001-M12*30	PU+PC	65(2.5")	24	82	25	M12x30	45
T03-PS23Z-CU90-6001-M12*30	PU+PC	75(3")	24	95	30	M12x30	50



NO.

Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Ring Stem 卡簧尺寸 (mm)	Load Capacity 承重 (kg)
T025-PDB23Z-CU90-6001-M12*30	PU+PC	65(2.5")	24	82	25	M12x30	45
T03-PDB23Z-CU90-6001-M12*30	PU+PC	75(3")	24	95	30	M12x30	50



中轻型灰胶轮

Mid/Light Duty Gray Rubber Caster



单轮选配
Caster Combination



PVAF88



PVAF86



PVAF99




PVBO88



PVBO18



支架表面处理
Surface Coating



E 电泳



Z 镀锌



E 阳极



G 镀金



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	G02-F23Z-PVAF88-MG	PVC	50(2")	17	68	20	65X47	53X33	6.5	35
	G03-F23Z-PVAF88-MG	PVC	75(3")	22	99	30	100X58	81X40	8.5	50
	G04-F23Z-PVAF88-MG	PVC	100(4")	27	129	32	100X58	81X40	8.5	60

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	G02-FS23Z-PVAF88-MG	PVC	50(2")	17	68	20	50X50	35X35	6.5	35
	G03-FS23Z-PVAF88-MG	PVC	75(3")	22	99	30	65X65	49X49	8.5	50
	G04-FS23Z-PVAF88-MG	PVC	100(4")	27	129	32	76X76	57X57	8.5	60

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底板尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	G02-FDB23Z-PVAF88-MG	PVC	50(2")	17	68	20	50X50	35X35	6.5	35
	G03-FDB23Z-PVAF88-MG	PVC	75(3")	22	99	30	65X65	49X49	8.5	50
	G04-FDB23Z-PVAF88-MG	PVC	100(4")	27	129	32	76X76	57X57	8.5	60



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 螺纹尺寸 (mm)	Load Capacity 承重 (kg)
	G02-LS23Z-PVAF88-MG-M12*30	PVC	50(2")	17	68	20	M10x25	35
	G03-LS23Z-PVAF88-MG-M12*30	PVC	75(3")	22	99	30	M12x30	50
	G04-LS23Z-PVAF88-MG-M12*30	PVC	100(4")	27	129	32	M12x30	60

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 螺纹尺寸 (mm)	Load Capacity 承重 (kg)
	G02-LDB23Z-PVAF88-MG-M12*30	PVC	50(2")	17	68	20	M10x25	35
	G03-LDB23Z-PVAF88-MG-M12*30	PVC	75(3")	22	99	20	M12x30	50
	G04-LDB23Z-PVAF88-MG-M12*30	PVC	100(4")	27	129	32	M12x30	60



中型单轴PVC脚轮 Medium Duty Single Ball Bearing pvc Caster



单轮选配

Caster Combination



支架表面处理

Surface Coating



PVAOH94



PVAOH9




PVAOH19



PVAOH12



PVAOH88




E 电泳



Z 镀锌



S 喷粉



G 镀金



NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-F23Z-PVAOH94-6001	PVC	75(3")	33	105	36	93x62	72X45	8.5	80
	M04-F23Z-PVAOH94-6001	PVC	100(4")	33	130	35	93X62	72X45	8.5	100
	M05-F23Z-PVABH94-6001	PVC	125(5")	33	158	34.5	93X62	72X45	8.5	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FS23Z-PVABH94-6001	PVC	75(3")	33	105	36	93x62	72X45	8.5	80
	M04-FS23Z-PVABH94-6001	PVC	100(4")	33	130	35	93X62	72X45	8.5	100
	M05-FS23Z-PVABH94-6001	PVC	125(5")	33	158	34.5	93X62	72X45	8.5	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
	M03-FDB23Z-PVABH94-6001	PVC	75(3")	33	105	36	93x62	72X45	8.5	80
	M04-FDB23Z-PVABH94-6001	PVC	100(4")	33	130	35	93X62	72X45	8.5	100
	M05-FDB23Z-PVABH94-6001	PVC	125(5")	33	158	34.5	93X62	72X45	8.5	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LS23Z-PVABH94-6001-M12*30	PVC	75(3")	33	105	36	M12x30	80
	M04-LS23Z-PVABH94-6001-M12*30	PVC	100(4")	33	130	35	M12x30	100
	M05-LS23Z-PVABH94-6001-M12*30	PVC	125(5")	33	158	34.5	M12x30	110

NO.	Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
	M03-LDB23Z-PVABH94-6001-M12*30	PVC	75(3")	33	105	36	M12x30	80
	M04-LDB23Z-PVABH94-6001-M12*30	PVC	100(4")	33	130	35	M12x30	100
	M05-LDB23Z-PVABH94-6001-M12*30	PVC	125(5")	33	158	34.5	M12x30	110



透明脚轮 Transparent Caster



单轮选配
Caster Combination



Cu0



CUBF0



支架表面处理
Surface Coating



E 电泳



Z 镀锌



C 镀铬



S 橡胶



NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
T015-F12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	42X42	32X32	4.5	25
T02-F12Z-CU0-ZMD	PU+PC	50(2")	21	64	18.5	42X42	32X32	4.5	35
T03-F12Z-CU0-ZMD	PU+PC	75(3")	22	96.5	28	60X60	45X45	8.5	40
T04-F12Z-CU0-ZMD	PU+PC	100(4")	27	125	32	60X60	45X45	8.5	50

NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
T015-FS12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	42X42	32X32	4.5	30
T02-FS12Z-CU0-ZMD	PU+PC	50(2")	21	64	18.5	42X42	32X32	4.5	35
T03-FS18Z-CU0-ZMD	PU+PC	75(3")	22	96.5	28	60X60	45X45	8.5	45
T04-FS18Z-CU0-ZMD	PU+PC	100(4")	27	125	32	60X60	45X45	8.5	50

NO.									
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Plate Size 底座尺寸 (mm)	Hole Spacing 孔距 (mm)	Hole Size 孔径 (mm)	Load Capacity 承重 (kg)
T015-FDB12Z-CU0-ZMD	PU+PC	38(1.5")	23.5	50	16.5	42X42	32X32	4.5	30
T02-FDB12Z-CU0-ZMD	PU+PC	50(2")	21	64	18.5	42X42	32X32	4.5	35
T03-FDB18Z-CU0-ZMD	PU+PC	75(3")	22	96.5	28	60X60	45X45	8.5	45
T04-FDB18Z-CU0-ZMD	PU+PC	100(4")	27	125	32	60X60	45X45	8.5	50

NO.								
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)	
T015-LS12Z-CU0-ZMD-M8*25	PU+PC	38(1.5")	23.5	50	16.5	M8X25	30	
T02-LS15Z-CU0-ZMD-M8*25	PU+PC	50(2")	21	64	18.5	M8X25	35	
T03-LS18Z-CU0-ZMD-M12*30	PU+PC	75(3")	22	96.5	28	M12X30	45	
T04-LS18Z-CU0-ZMD-M12*30	PU+PC	100(4")	27	125	32	M12X30	50	

NO.							
Model 型号	Wheel Material 轮子材质	Wheel Dia 轮径 (mm)	Wheel Width 轮宽 (mm)	Overall Height 安装高度 (mm)	Swivel Radius 转动半径 (mm)	Threaded Size 丝杆尺寸 (mm)	Load Capacity 承重 (kg)
T015-LDB12Z-CU0-ZMD-M8*25	PU+PC	38(1.5")	23.5	50	16.5	M8X25	30
T02-LDB15Z-CU0-ZMD-M8*25	PU+PC	50(2")	21	64	18.5	M8X25	35
T03-LDB18Z-CU0-ZMD-M12*30	PU+PC	75(3")	22	96.5	28	M12X30	45
T04-LDB18Z-CU0-ZMD-M12*30	PU+PC	100(4")	27	125	32	M12X30	50



304-E定向



301-B平底刹车



301-D平底万向



302-B丝杆刹车



302-D丝杆万向



303-B插杆刹车



303-D插杆万向

型号

model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lotion height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-301-D40-01	PVC	1.5 '(40)	22	68	60*43	42*30	6.5	8*25	35
WX-301-B40-01								10*25	
WX-302-D40-01								10*30	
WX-303-D40-01								12*25	
WX-303-B40-01								12*30	
WX-304-E40-01	PVC	2 '(50)	27	70	70*50	52*35	8.5	8*25	50
WX-301-D50-01								10*25	
WX-301-B50-01								10*30	
WX-302-D50-01								10*30	
WX-302-B50-01								12*25	
WX-303-D50-01								12*25	
WX-303-B50-01								12*30	
WX-304-E50-01									

刹车效果: 踩踏式结构 人性化设计: 刹车更稳定



302-B丝杆刹车



302 -D丝杆万向



303-B插杆刹车



303 -D插杆万向

型号

model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lotion height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-306-D40-01	PVC	1.5 '(40)	22	68	60*43	42*30	3	12*60	35
WX-306-B40-01									
WX-307-D40-01									
WX-307-B40-01									
WX-306-D50-01	PVC	2 '(50)	27	70	70*50	52*35	3	12*60	50
WX-306-B50-01									
WX-307-D50-01									
WX-307-B50-01									

⊙ 刹车效果: 踩踏式结构 ⊙ 人性化设计: 刹车更稳定



904 -E定向



901 -B平底刹车



901 -D平底万向



902-B丝杆刹车



902 -D丝杆万向



903 -B插杆刹车



903 -D插杆万向

型号

model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lotion height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-901-D50-01	PVC	2 '(50)	17	72	50*50	35*35	6	10*25	30
WX-901-B50-01								10*30	
WX-902-D50-01								12*25	
WX-903-D50-01								12*30	
WX-903-B50-01								12*30	
WX-904-E50-01	PVC	2.5 '(65)	21	90	65*65	45*45	8	10*25	40
WX-901-D65-01								10*30	
WX-902-B65-01								12*25	
WX-903-B65-01								12*30	
WX-904-E65-01								12*30	
WX-901-D75-01	PVC	3 '(75)	21	101	65*65	45*45	8	10*25	50
WX-901-B75-01								10*30	
WX-902-B75-01								12*25	
WX-903-B75-01								12*30	
WX-904-E75-01								12*30	
WX-901-D100-01	PVC	4 '(100)	27	125	75*75	55*55	8	10*25	65
WX-901-B100-01								10*30	
WX-902-D100-01								12*25	
WX-903-B100-01								12*30	
WX-904-E100-01								12*30	
WX-901-D125-01	PVC	5 '(125)	27	150	75*75	55*55	8	10*25	75
WX-901-B125-01								10*30	
WX-902-B125-01								12*25	
WX-903-D125-01								12*30	
WX-904-E125-01								12*30	



轻型TPR脚轮 Lightweight TPR casters



1604 -E定向



1601 -B平底刹车



1601 -D平底万向



1602 -B丝杆刹车



1602 -D丝杆万向

型号

model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lotion height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-1601-D25-01	TPR	1”(25)	13	38	39*33	30*24	4.2	6*15	15
WX-1601-B25-01									
WX-1602-D25-01									
WX-1602-B25-01									
WX-1604-E25-01	TPR	1.25”(32)	13	45	39*33	30*24	4.2	6*15	18
WX-1601-D32-01									
WX-1601-B32-01									
WX-1602-D32-01									
WX-1602-B32-01	TPR	1.5”(38)	17	52	46*38	36*28	5.2	8*20 10*20	25
WX-1601-D38-01									
WX-1601-B38-01									
WX-1602-D38-01									
WX-1602-B38-01	TPR	2”(50)	17	65	46*38	36*28	5.2	8*20 10*20	30
WX-1604-E38-01									
WX-1601-D50-01									
WX-1601-B50-01									
WX-1602-D50-01	TPR	2”(50)	17	65	46*38	36*28	5.2	8*20 10*20	30
WX-1602-B50-01									
WX-1604-E50-01									

🌀 刹车效果: 踩踏式结构

🌀 人性化设计: 刹车更稳定



尼龙家具轮 Nylon furniture wheel



1501 -B平底刹车



1501 -D平底万向



1502 -B丝杆刹车



1502 -D丝杆万向



1503 -B插杆刹车



1503 -D插杆万向

型号
model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lation height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-1501-D25-01	尼龙	1"(25)	32	45	30*30	22*22	5	8*15	10
WX-1501-B25-01									
WX-1502-D25-01									
WX-1502-B25-01									
WX-1503-D25-01									
WX-1503-B25-01	尼龙	1.25"(32)	32	45	30*30	26*26	5	8*15	15
WX-1501-D32-01									
WX-1501-B32-01									
WX-1502-D32-01									
WX-1502-B32-01									
WX-1503-D32-01	尼龙	1.5"(40)	41	56	38*38	26*26	5	10*20	25
WX-1501-D40-01									
WX-1501-B40-01									
WX-1502-D40-01									
WX-1502-B40-01									
WX-1503-D40-01	尼龙	2"(50)	43	61	38*38	26*26	5	10*20	30
WX-1501-D50-01									
WX-1501-B50-01									
WX-1502-D50-01									
WX-1502-B50-01									
WX-1503-B50-01									
WX-1503-D50-01									

刹车效果: 踩踏式结构
 人性化设计: 刹车更稳定



全黑家具轮 All black furniture wheel



101 -B平底刹车



101 -D平底万向



102 -B丝杆刹车



102 -D丝杆万向



103 -B插杆刹车



103 -D插杆万向



101 -B平底刹车



102 -D丝杆万向

型号

model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lotion height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-101-D50-01

WX-101-B50-01

WX-102-D50-01

WX-102-B50-01

WX-103-D50-01

WX-103-B50-01

WX-101-D60-01

WX-101-B60-01

WX-102-D60-01

WX-102-B60-01

WX-103-D60-01

WX-103-B60-01

WX-101-D75-01

WX-101-B75-01

WX-102-D75-01

WX-102-B75-01

WX-103-D75-01

WX-103-B75-01

PU

2"(50)

48

64

38*38

26*26

5

8*20
10*15
10*20
12*20

40

PU

2.5"(60)

48

76

42*42

32*32

5

8*20
10*15
10*20
12*20

55

PU

3"(75)

58

100

70*58

54*42

8.5

8*20
10*15
10*20
12*20

65

◎ 刹车效果: 踩踏式结构

◎ 人性化设计: 刹车更稳定



TPE 双轮 TPE two-wheel



601-B平底刹车



601-D平底万向



602-B丝杆刹车



602-D丝杆万向



603-B插杆刹车



603-D插杆万向

型号 model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lotion height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-601-D50-01	TPR	2 '(50)	50	66	42*42	32*32	5	8*25 10*25 10*30 12*25 12*30	60
WX-601-B50-01									
WX-602-D50-01									
WX-602-B50-01									
WX-603-D50-01									
WX-603-B50-01									

🕒 刹车效果: 踩踏式结构 🕒 人性化设计: 刹车更稳定



701-B平底刹车



701-D平底万向



702-B丝杆刹车



702-D丝杆万向

型号

model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lational height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-701-D75-01									
WX-701-B75-01	TPR	3 '(75)	54	100	70*58	55*43	8.5	12*25	75
WX-702-D75-01									
WX-702-B75-01									
WX-701-D100-01									
WX-701-B100-01	TPR	4' (100)	70	130	80*64	55*43	8.5	12*25	85
WX-702-D100-01									
WX-702-B100-01									
WX-701-D125-01									
WX-701-B125-01	TPR	5' (125)	85	162	90*74	66*52	8.5	16*30	100
WX-702-D125-01									
WX-702-B125-01									

刹车效果: 踩踏式结构
 人性化设计: 刹车更稳定



201 -B平底刹车



201 -D平底万向



202 -B丝杆刹车



202 -D丝杆万向



203 -B插杆刹车



203-D插杆万向



201 -B平底刹车



202 -D丝杆万向

型号

model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lotion height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-201-D50-01	PU	2 '(50)	45	68	42*42	32*32	5	10*15 12*20	35
WX-201-B50-01									
WX-202-D50-01									
WX-202-B50-01									
WX-203-B50-01									
WX-201-D65-01	PU	2.5(65)	45	80	42*42	32*32	5	10*15 12*20	50
WX-201-B65-01									
WX-202-D65-01									
WX-202-B65-01									
WX-203-D65-01									
WX-203-B65-01	PU	3' (75)	58	100	70*58	54*42	8.5	10*15 12*20	60
WX-201-D75-01									
WX-201-B75-01									
WX-202-D75-01									
WX-202-B75-01									
WX-203-D75-01									
WX-203-B75-01									

刹车效果: 踩踏式结构
 人性化设计: 刹车更稳定



医疗双刹双片轮

Medical double brake double disc wheel



401-B平底刹车



401-D平底万向



402-B丝杆刹车



402-D丝杆万向



401-B平底刹车



401-D平底万向



402-B丝杆刹车



402-D丝杆万向

型号

model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



lotion height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-401-D75-01									
WX-401-B75-01	PU	3 '(75)	58	100	70*58	54*42	8.5	12*25	65
WX-402-D75-01									
WX-402-B75-01									
WX-401-D100-01									
WX-401-B100-01	PU	4 '(100)	58	130	90*75	70*55	8.5	12*25	80
WX-402-D100-01									
WX-402-B100-01									
WX-401-D125-01									
WX-401-B125-01	PU	5 '(125)	65	155	95*62	75*45	8.5	16*30	90
WX-402-D125-01									
WX-402-B125-01									

◎ 刹车效果: 踩踏式结构

◎ 人性化设计: 刹车更稳定



501-B平底刹车



501-D平底万向



502-B丝杆刹车



502-D丝杆万向



501-B平底刹车



501-D平底万向



502-B丝杆刹车



502-D丝杆万向



501-B平底刹车



501-D平底万向



502-B丝杆刹车



502-D丝杆万向

型号

model



The material
材质



wheel dia
轮径
(MM)



Wheel width
轮宽
(MM)



Installation height
安装高度
(MM)



Plate size
底板尺寸
(MM)



Pitch
孔距
(MM)



The aperture
孔径
(MM)



specifications
丝杆规格
(MM)



load
载重
(KG)

WX-501-D50-01

WX-501-B50-01

WX-502-D50-01

WX-502-B50-01

WX-501-D75-01

WX-501-B75-01

WX-502-D75-01

WX-502-B75-01

WX-501-D100-01

WX-501-B100-01

WX-502-D100-01

WX-502-B100-01

WX-501-D125-01

WX-501-B125-01

WX-502-D125-01

WX-502-B125-01

	TPR	2" (50)	24	90	70*58	54*42	8.5	12*25	50
	TPR	3" (75)	24	116	70*58	54*42	8.5	12*25	75
	TPR	4" (100)	32	143	95*62	54*42	8.5	12*25	85
	TPR	5" (125)	32	167	95*62	54*42	8.5	16*30	100

⊙ 刹车效果: 踩踏式结构

⊙ 人性化设计: 刹车更稳定



Guangdong Goodich Hardware Co.Ltd

**Address: 9th Floor, No 3419, Shengxin Road,
Yuntong Building, JiaDing Area,
Shanghai, China,**

Elli:0086-180 1621 6906

