



GOODICH FURNITURE HARDWARE

Not the best Only better



EMAIL: export01@goodich-hardware.com
WECHAT/WHATSAPP: +86 15618525178
PHONE: +86 18016216906
WEBSITE: <https://goodich-hardware.com/>



CONTENTS



01 / P 01
About us

02 / P 07
**Powder coated
drawer slide**

03 / P 11
**Ball bearing
drawer slide**

04 / P 25
**Undermount
drawer slide**

05 / P 41
Hinges series



COMPANY INTRODUCTION

Guangdong Goodich Hardware Co.Ltd is a technology-enabled furniture hardware solution supplier that creates tailored strategies for our clients based on their brands and businesses. Furniture hinges, drawer slides, with SGS test results are shipped to Europe, South America, North America, Southeast Asia, and all other nations and regions.



Our team consists of award-winning designers, structural engineers, and testing specialists that understand how to deliver tangible benefits for your organization. We also prioritize the most critical KPIs, such as total cost and quality evolution. We understand that attaining these objectives is the driving force that propels your company ahead, and we feel that our clients' success is the strongest indicator of our own performance.

20 +

With 20 years of expertise

HIGH

quality standards

OPTIMAL

supply chain

With 20 years of expertise in furniture hardware, we realize that although each hardware has the best approach to decrease costs and enhance quality, we have discovered the optimal supply chain and quality standards to support your furniture hardware. As long as you are seeking for hardware accessories, please contact us; we can provide more than simply the goods listed on the website.

COMPANY TEAM HIGHLIGHTS

80% SALES INCREASE

Deepen worldwide Internet marketing and fiercely promote the global layout. Further improve the supply chain, capitalize on economies of scale, achieve 80% performance increase throughout the year, and gain new clients in over 80 countries and regions.

40% SALES INCREASE

Sales increased by 40% during the course of the year, and new clients were gained in over 50 countries and regions.

COMPREHENSIVE REFORM

The business department established independent financial accounting and formally adopted the amoeba model. The corporate building was officially finished.

SALES GREW BY 30%

I traveled to Germany to participate in the Cologne Hardware Fair. The workplace has been completely refurbished, with a 1300-square-meter office and an 800-square-meter sky garden. Improved yearly performance by 30%.

CONSTANT GROWTH

The yearly sales surpassed 70 million yuan.

WEBSITE SETUP

The company's VI image was entirely improved, and its official website was launched.

CONSTANT GROWTH

The yearly sales surpassed 70 million yuan.

COMPANY ENVIRONMENT

DRAWER SLIDE



HINGES



02


POWDER COATED DRAWER SLIDE

P-01 BLUM TYPE DRAWER SLIDE

Material	Cold rolled steel
Finishing	White/black/brown/grey
Size	250-600mm
Loading capacity	25KGS



PRODUCT TECHNICAL INFORMATION

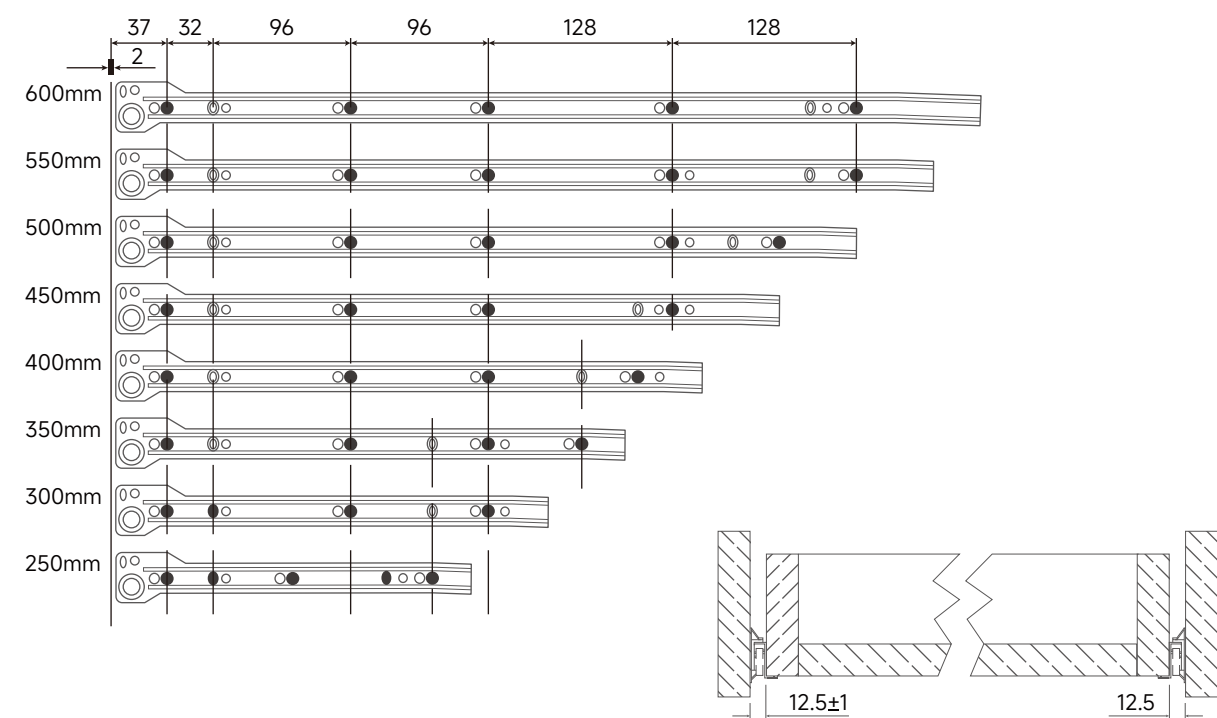


P-02 FGV TYPE DRAWER SLIDE

Material	Cold rolled steel
Finishing	White/black/brown/grey
Size	250-600mm
Loading capacity	25KGS



PRODUCT TECHNICAL INFORMATION

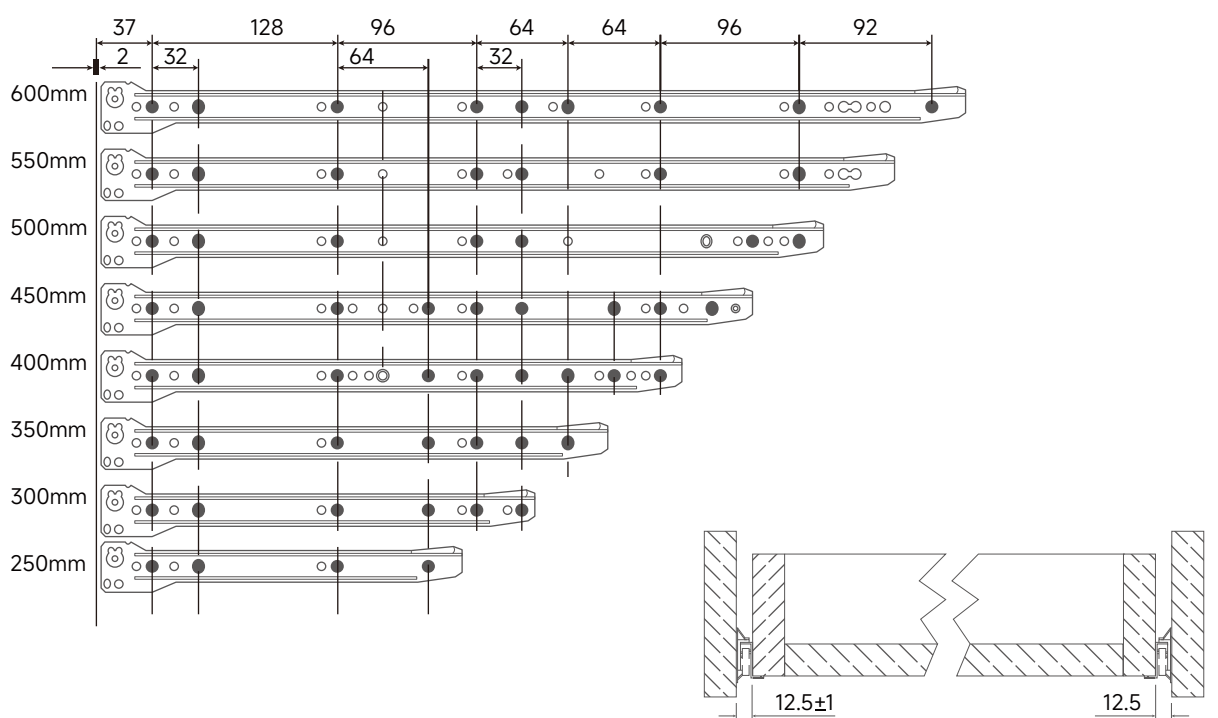


P-03
METAL BOXES

Material	Cold rolled steel
Finishing	White/black/brown/grey
Size	250-600mm
Loading capacity	25KGS
Height	54/86/118/150mm



PRODUCT TECHNICAL INFORMATION

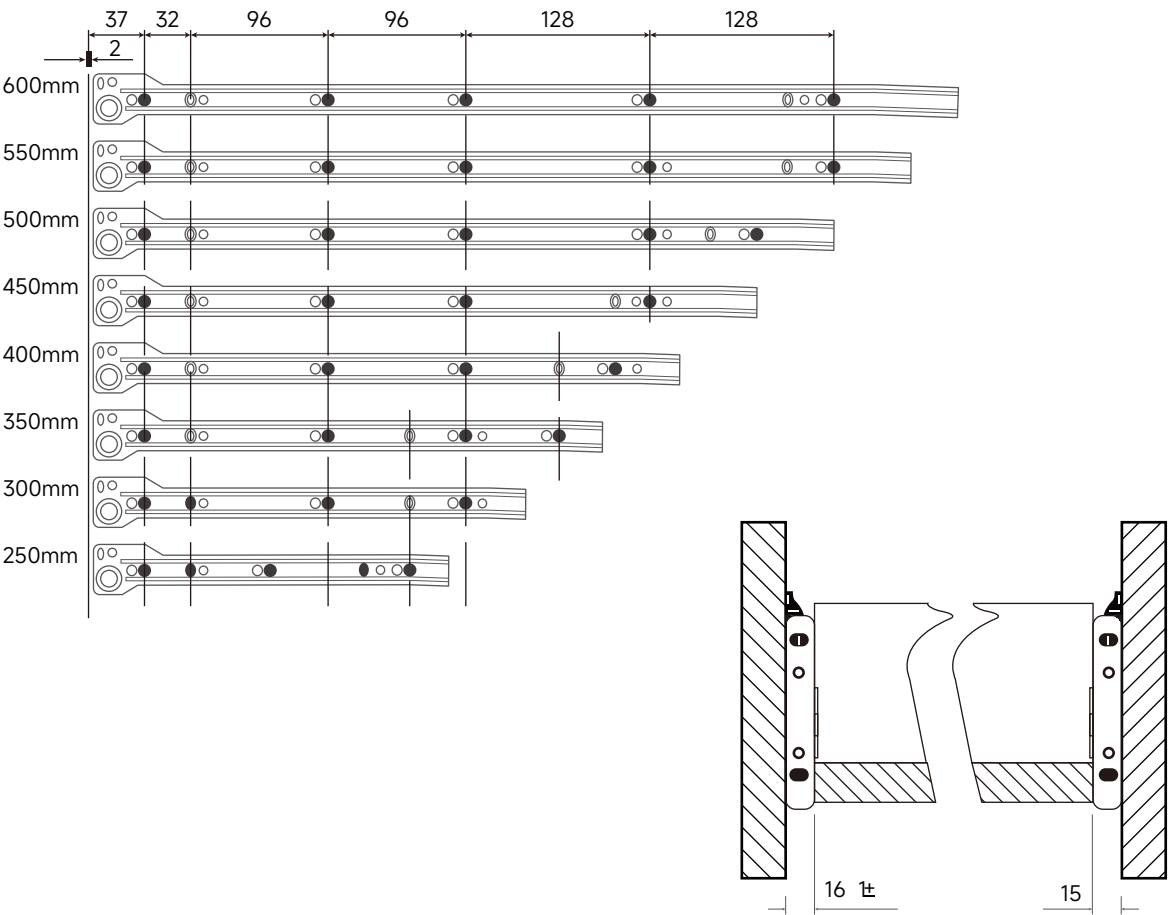


P-04
RAILING SYSTEM FOR METAL BOXES

Material	Aluminium
Finishing	White/black/brown/grey
Size	270-550mm



PRODUCT TECHNICAL INFORMATION

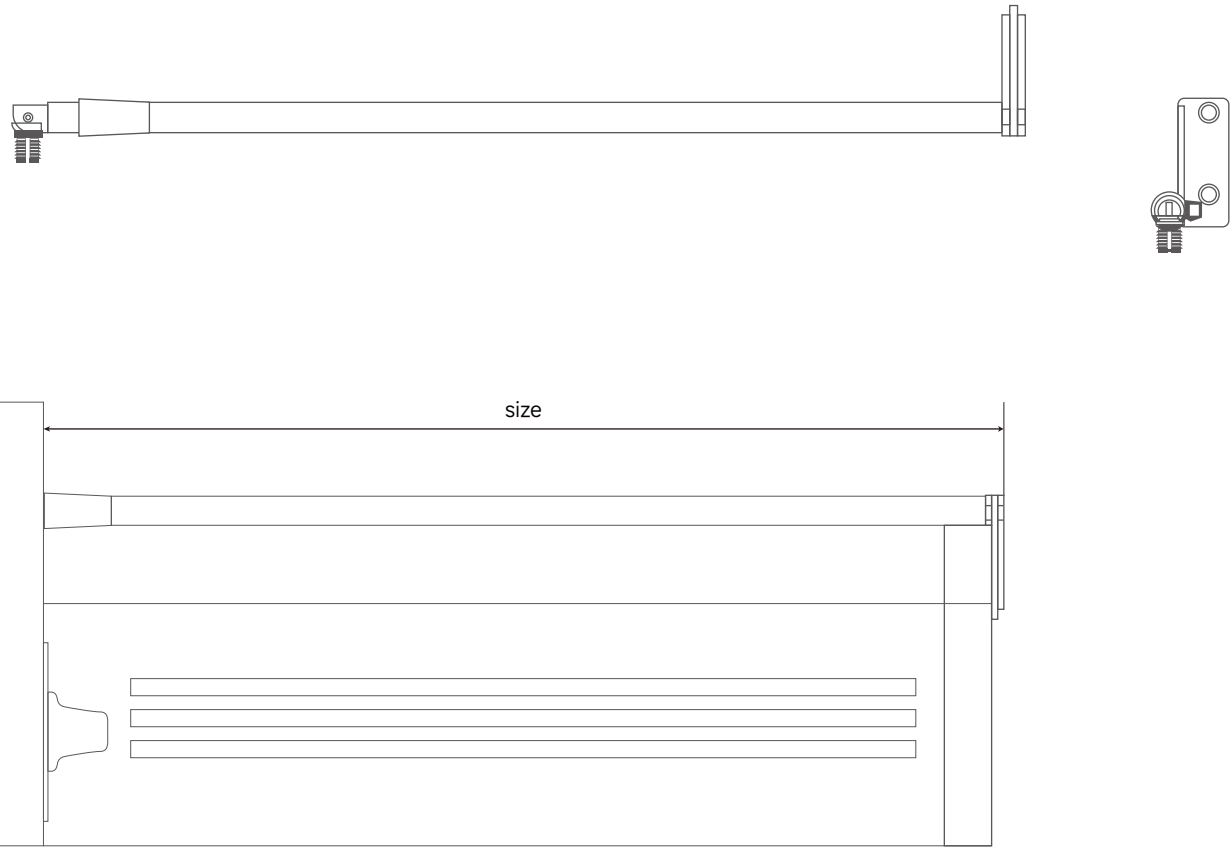

03


BALL BEARING DRAWER SLIDE

B-17 17MM BALL BEARING DRAWER SLIDE

Material	Steel/galvanized steel
Finishing	Zinc/black/galvanized
Size	150-502mm
Loading capacity	10KGS



PRODUCT TECHNICAL INFORMATION

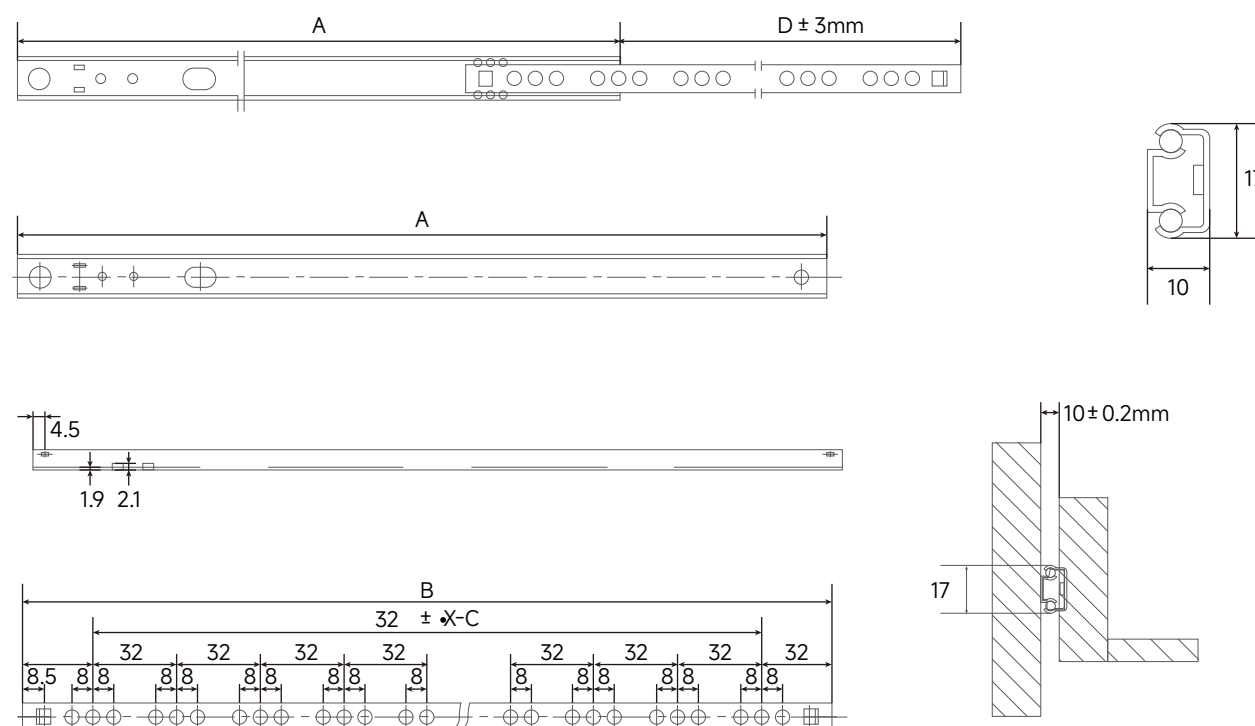


B-27

27MM BALL BEARING DRAWER SLIDE

Material	Cold rolled steel
Finishing	Zinc/black
Size	250-500mm
Loading capacity	15KGS



PRODUCT TECHNICAL INFORMATION

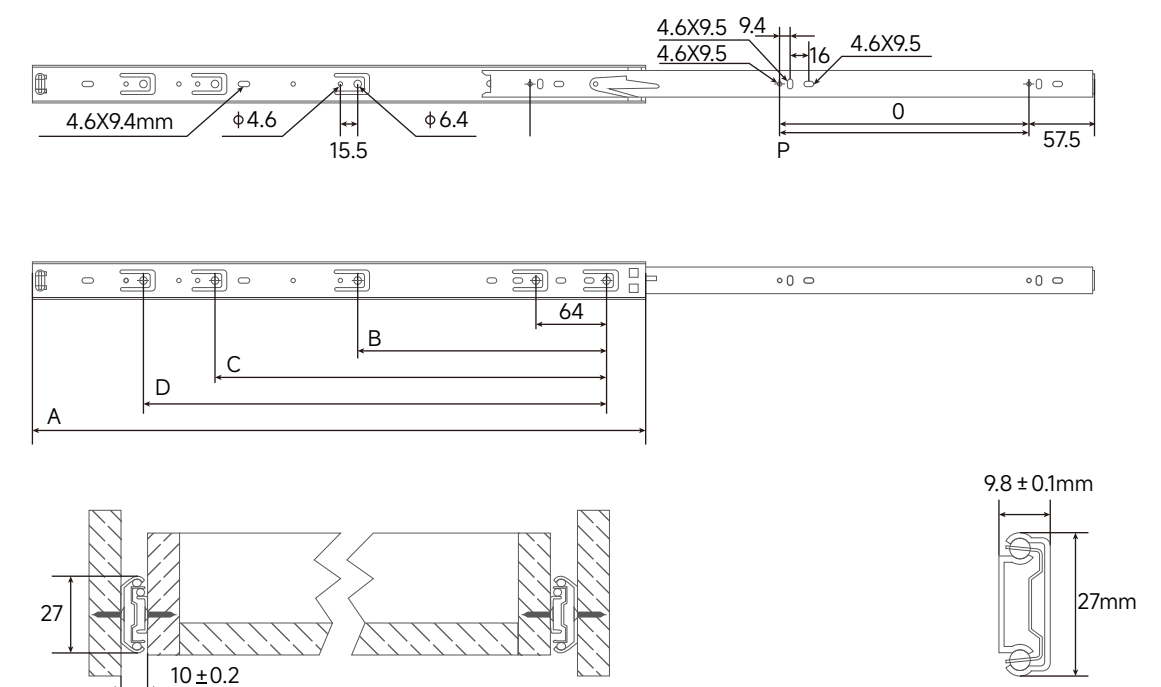


B-35
35MM BALL BEARING DRAWER SLIDE

Material	Cold rolled steel
Finishing	Zinc/black
Size	250-600mm
Loading capacity	35KGS



PRODUCT TECHNICAL INFORMATION

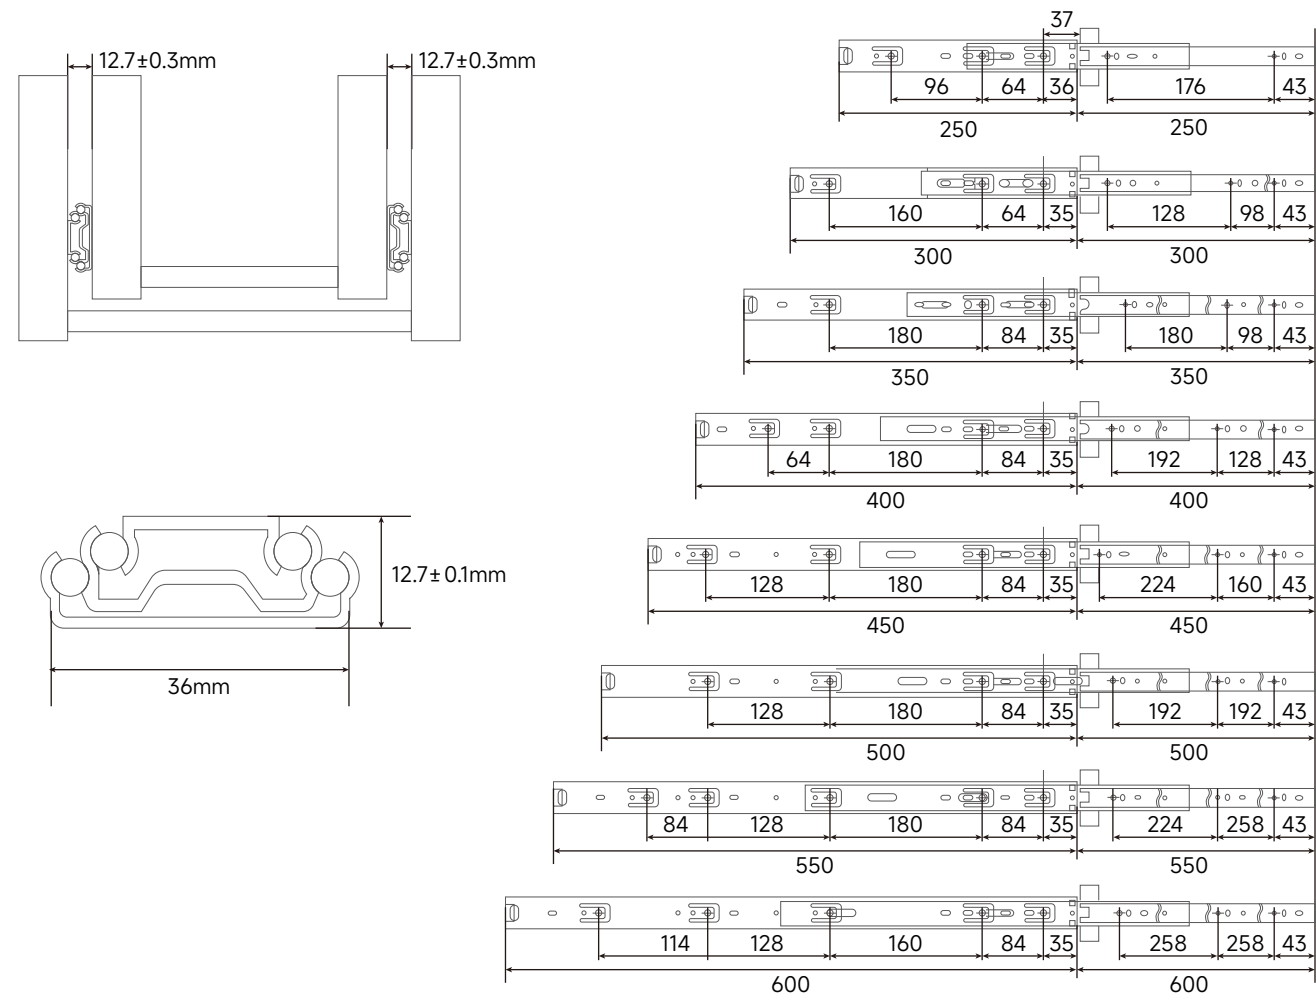


BS-35
35 MM SOFT CLOSE DRAWER SLIDE

Material	Cold rolled steel
Finishing	Zinc/black
Size	300-600mm
Loading capacity	30KGS



PRODUCT TECHNICAL INFORMATION

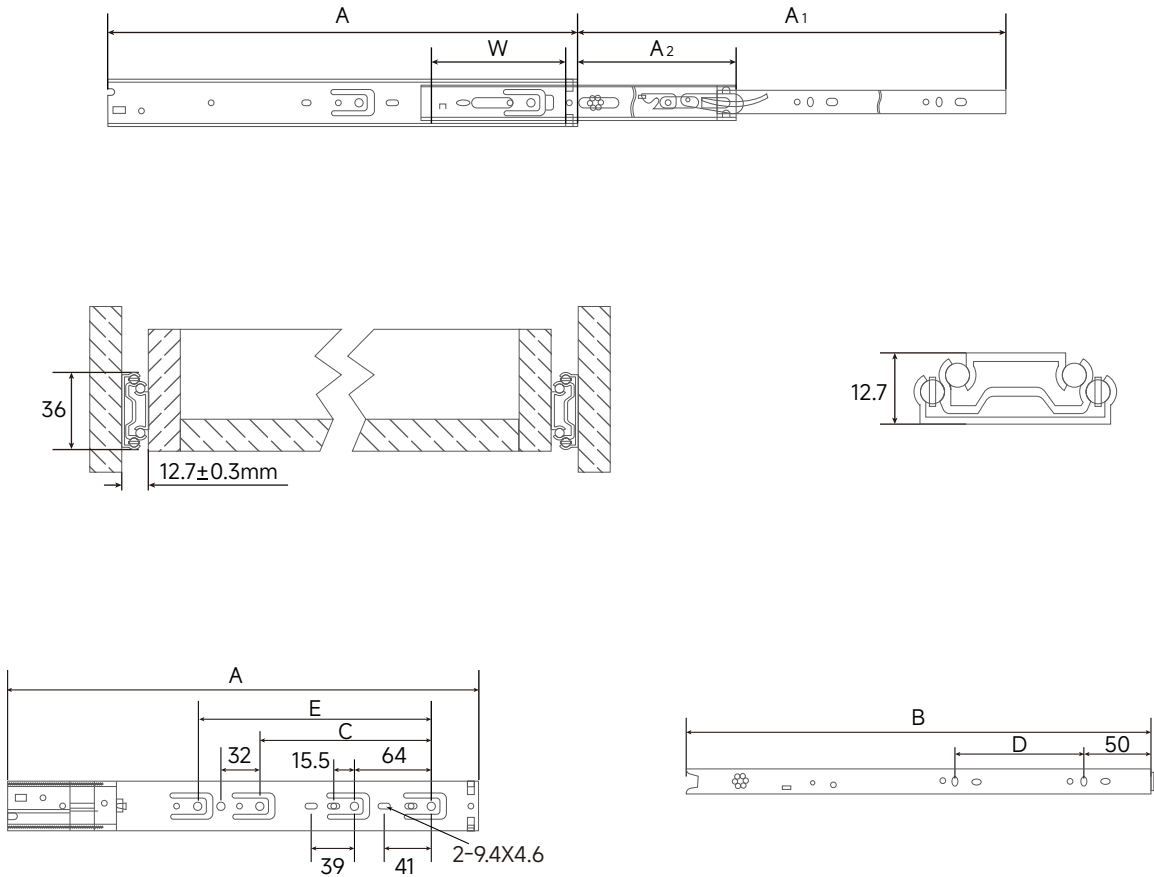


B-45

45MM BALL BEARING DRAWER SLIDE

Material	Cold rolled steel
Finishing	Zinc/black
Size	250-600mm
Loading capacity	45KGS



PRODUCT TECHNICAL INFORMATION

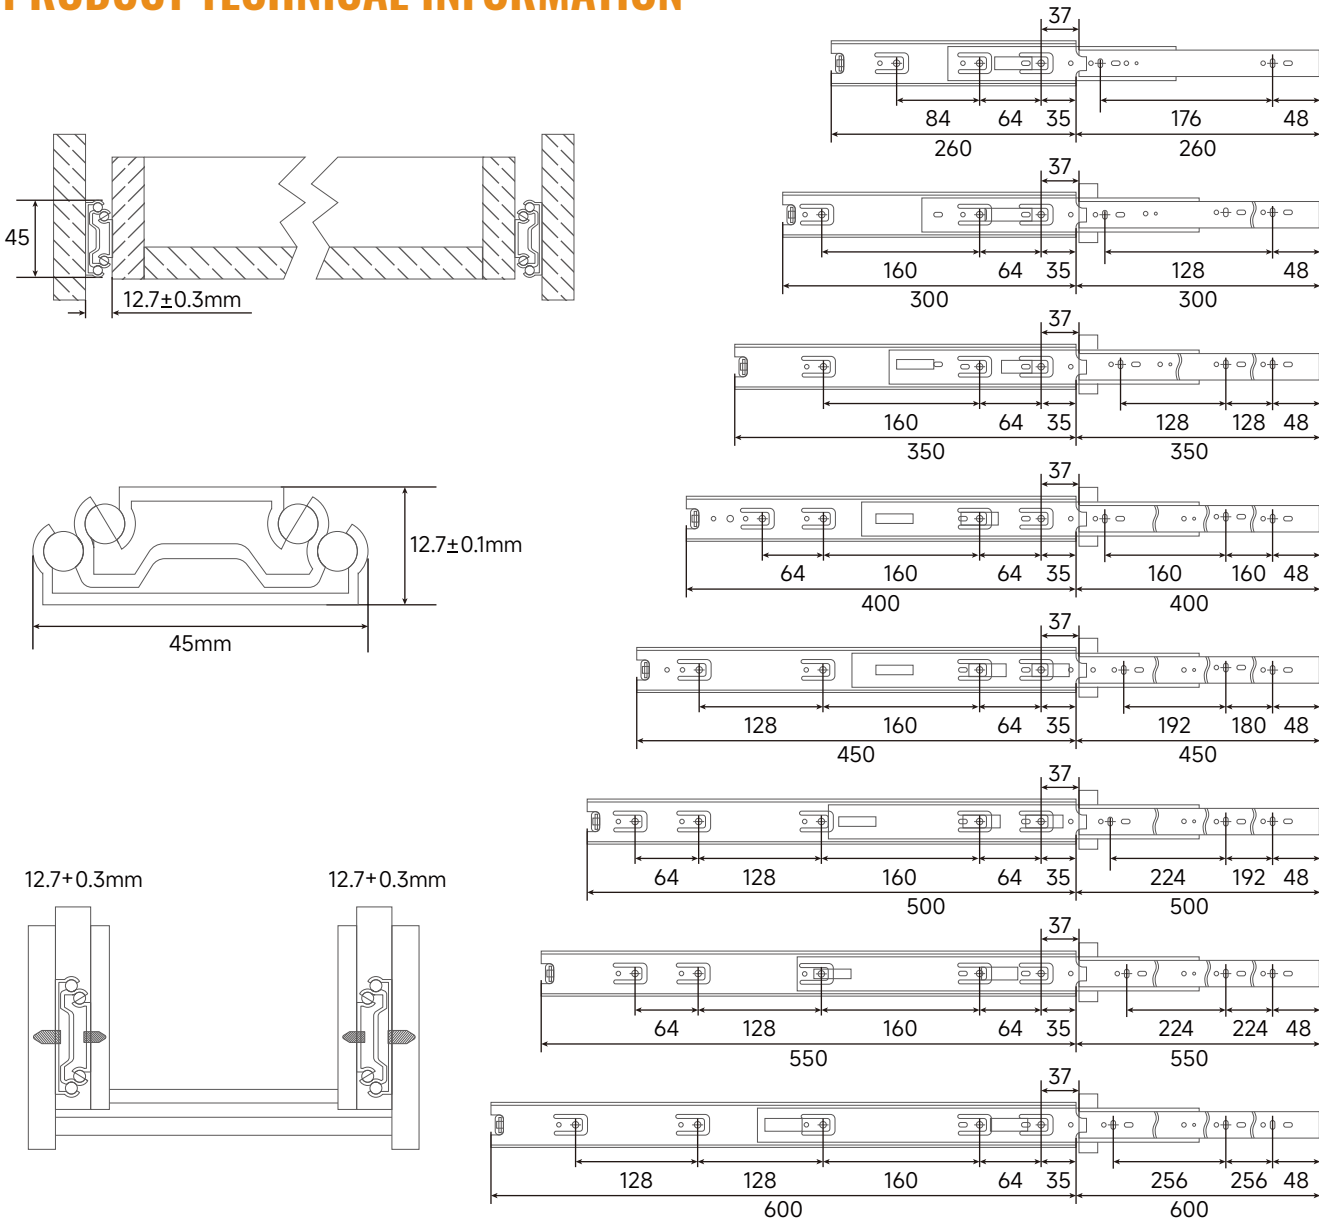


BS-45

45MM SOFT CLOSE DRAWER SLIDE

Material	Cold rolled steel
Finishing	Zinc/black
Size	300-600mm
Loading capacity	35KGS



PRODUCT TECHNICAL INFORMATION

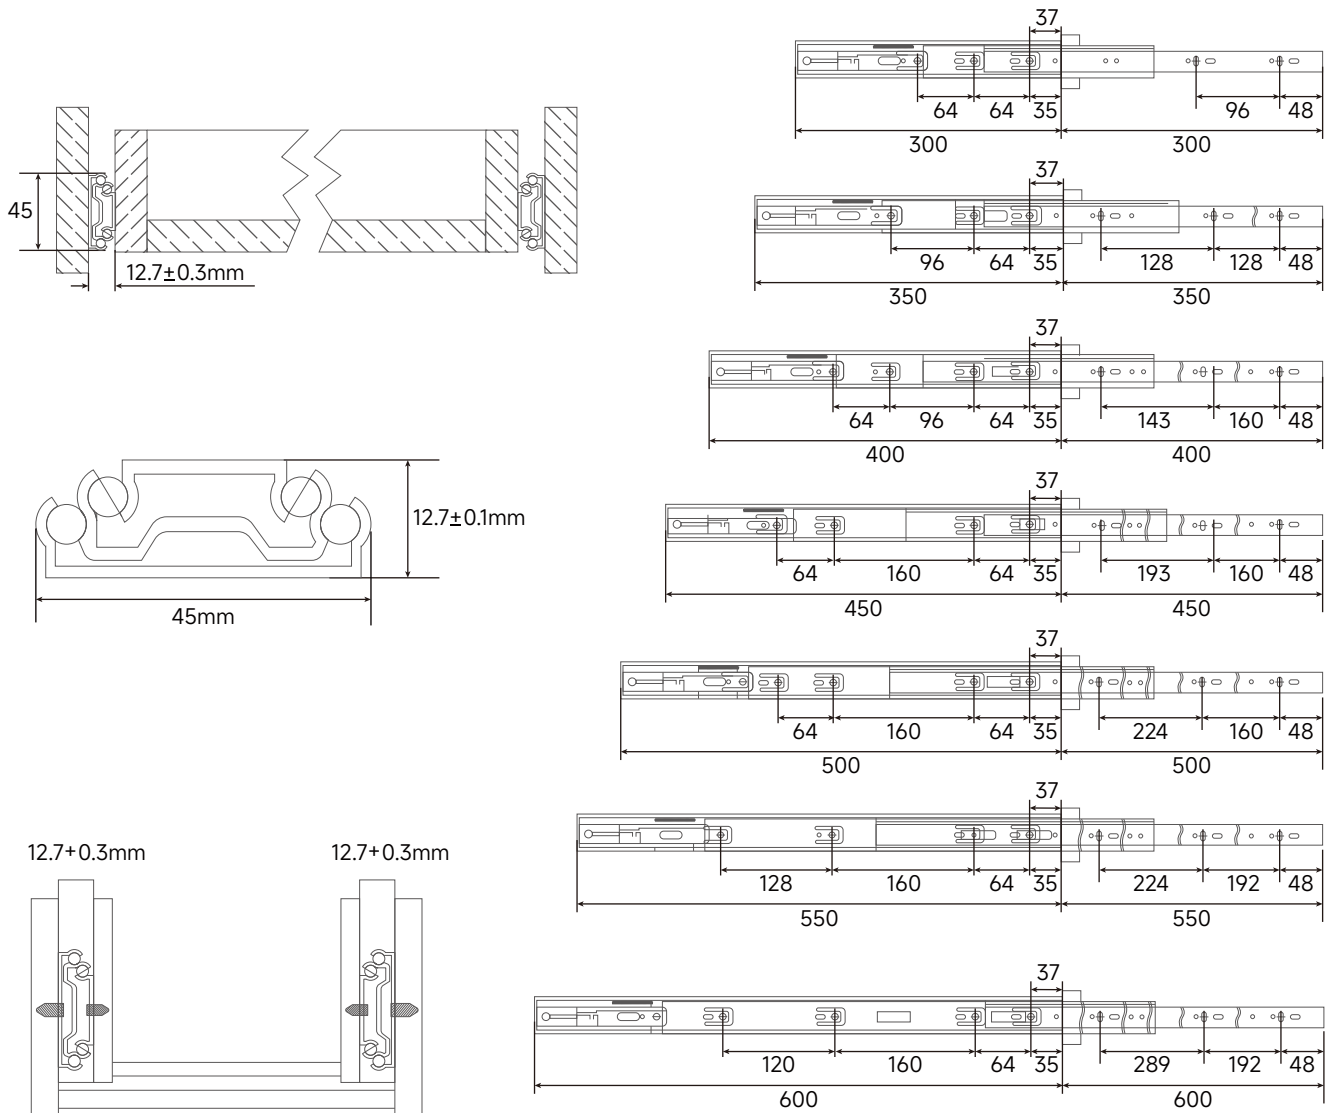


BP-45

45 MM PUSH-OPEN DRAWER SLIDE

Material	Cold rolled steel
Finishing	Zinc/black
Size	250-600mm
Loading capacity	35KGS




PRODUCT TECHNICAL INFORMATION

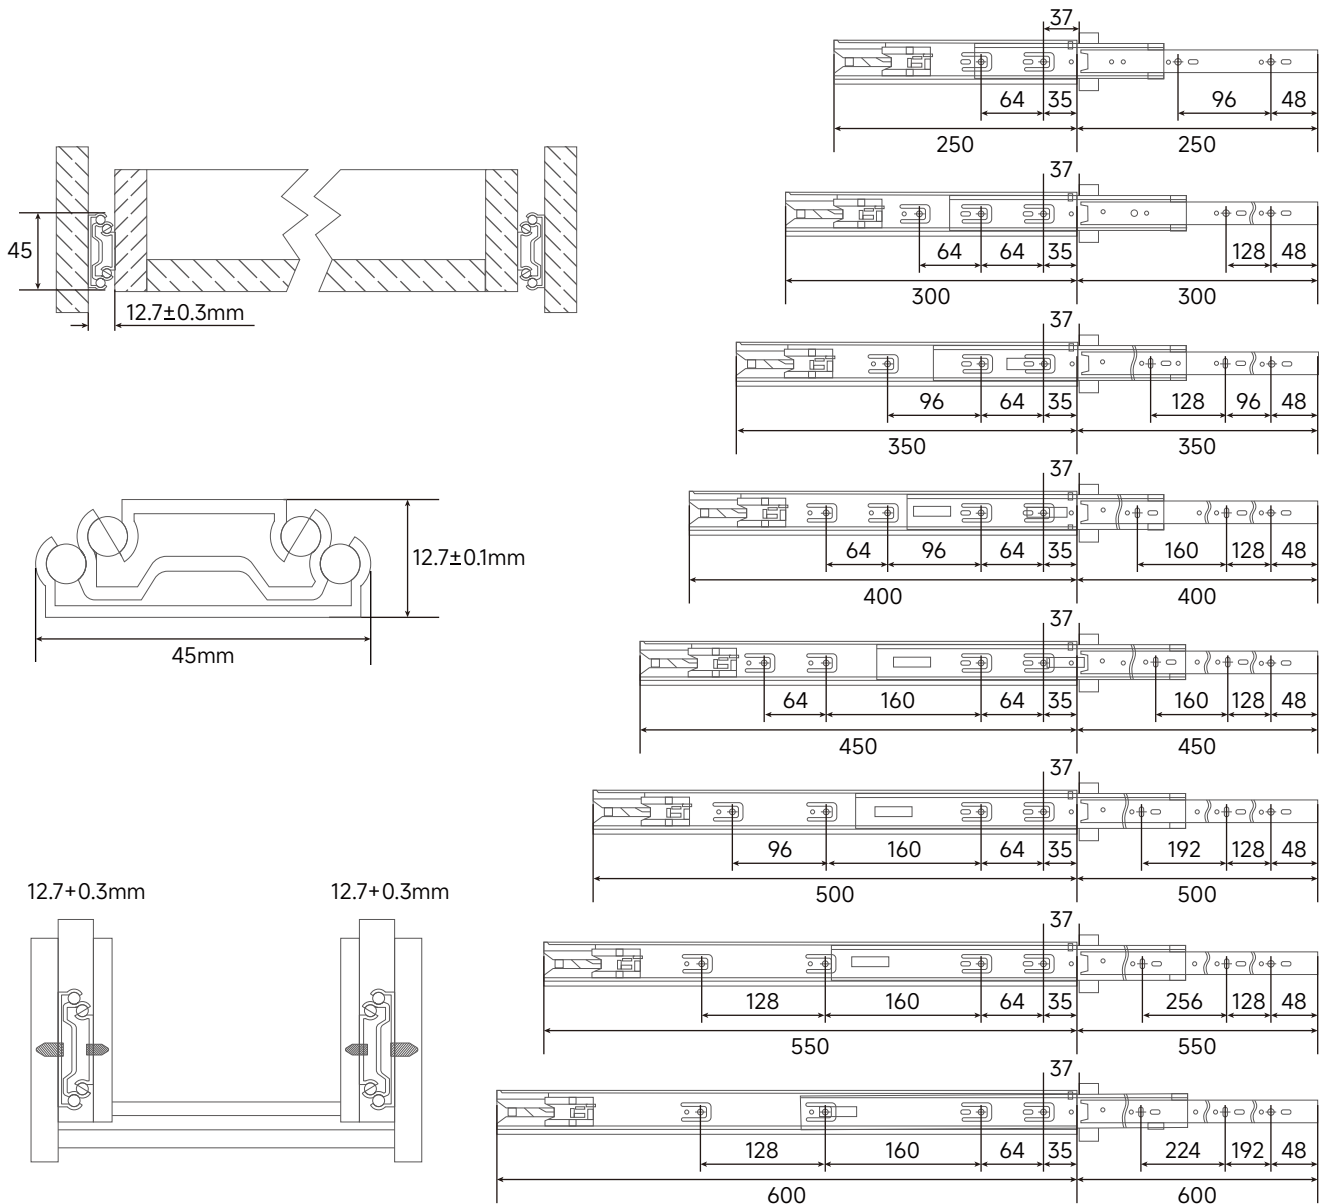

H-51

51MM HEAVY DUTY DRAWER SLIDE

Material	Cold rolled steel
Finishing	Blue and white zinc
Size	250-1800mm
Loading capacity	60KGS

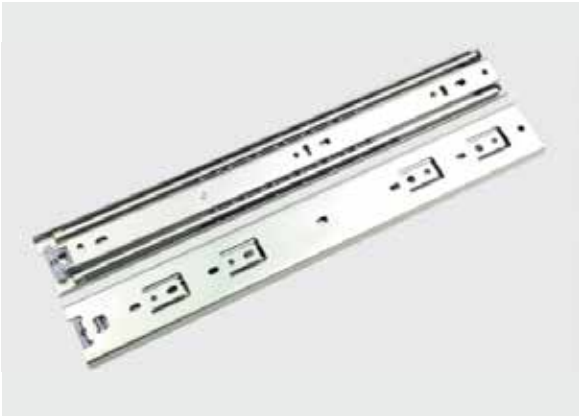

HL-51

51MM HEAVY DUTY DRAWER SLIDE WITH LOCK

Material	Cold rolled steel
Finishing	Blue and white zinc
Size	250-1800mm
Loading capacity	60KGS




H-53 53MM HEAVY DUTY DRAWER SLIDE

Material	Cold rolled steel
Finishing	Blue and white zinc
Size	250-1800mm
Loading capacity	115KGS



PRODUCT TECHNICAL INFORMATION

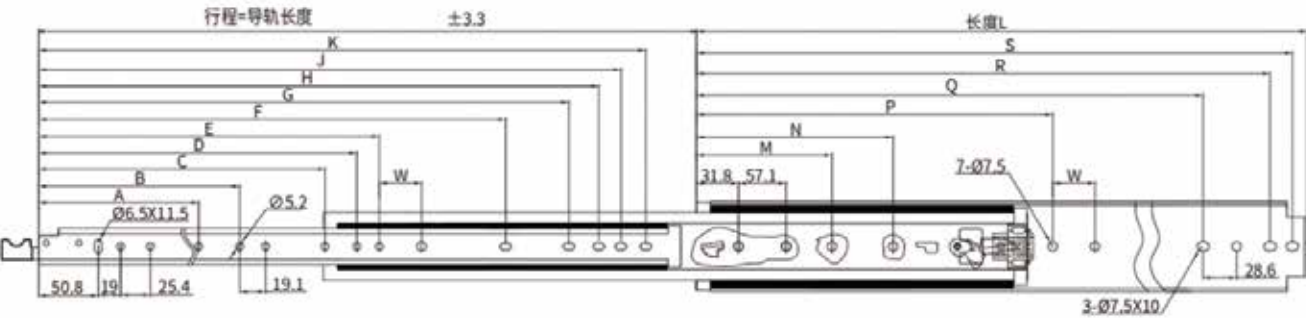

封蓝处理
 表面经过精密封蓝处理氧化，
 经久耐磨，防止生锈。
 The surface is treated with high-precision
 blue electroplating, high oxidation resistance,
 durable wear, super anti-rust




HL-53 53MM HEAVY DUTY DRAWER SLIDE WITH LOCK

Material	Cold rolled steel
Finishing	Blue and white zinc
Size	250-1800mm
Loading capacity	115KGS



PRODUCT TECHNICAL INFORMATION

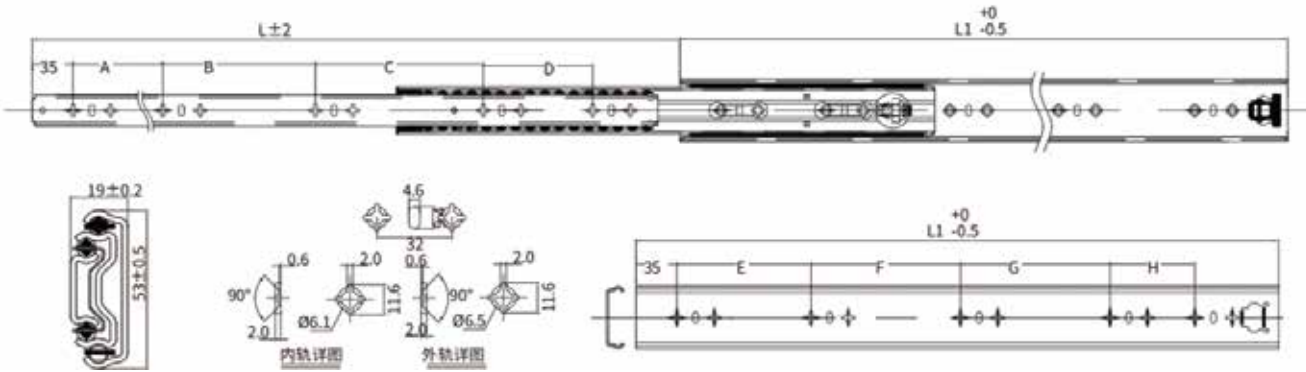


H-76
76MM HEAVY DUTY DRAWER SLIDE

Material	Cold rolled steel
Finishing	Blue and white zinc
Size	254-2032mm
Loading capacity	227KGS




PRODUCT TECHNICAL INFORMATION

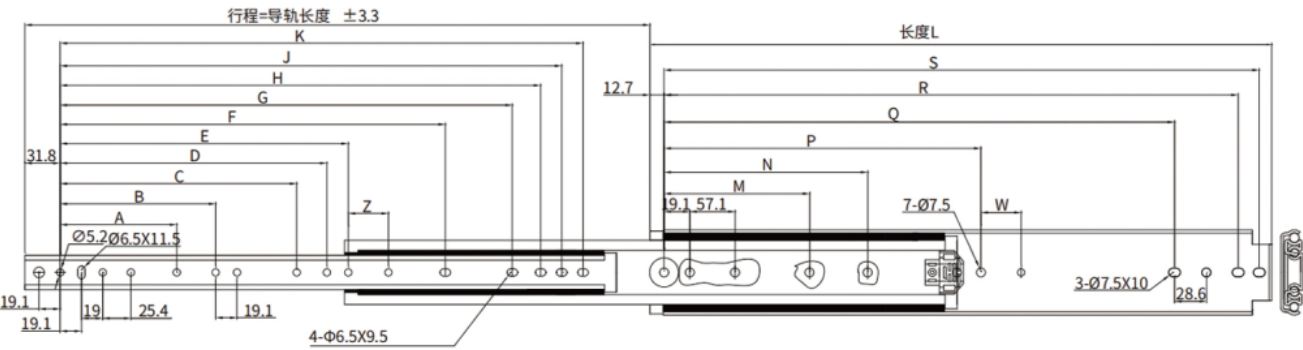

顺序拉出功能
通过内轨凹型设计与中轨高强度塑料配合，在抽屉展开过程中达到顺序拉出，从而保证抽屉的稳定性和安全性。
Pull out with sequence functions
Through the concave design of the inner rail and the high-strength plastic of the middle rail, the drawer can be pulled out sequentially during the unfolding process in order to ensure the stability and safety of the drawer.



加强筋结构
Structural strengthening of the slide rail

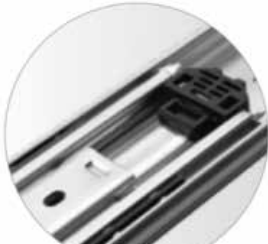


HL-76
76MM HEAVY DUTY DRAWER SLIDE WITH LOCK

Material	Cold rolled steel
Finishing	Blue and white zinc
Size	254-2032mm
Loading capacity	227KGS



PRODUCT TECHNICAL INFORMATION

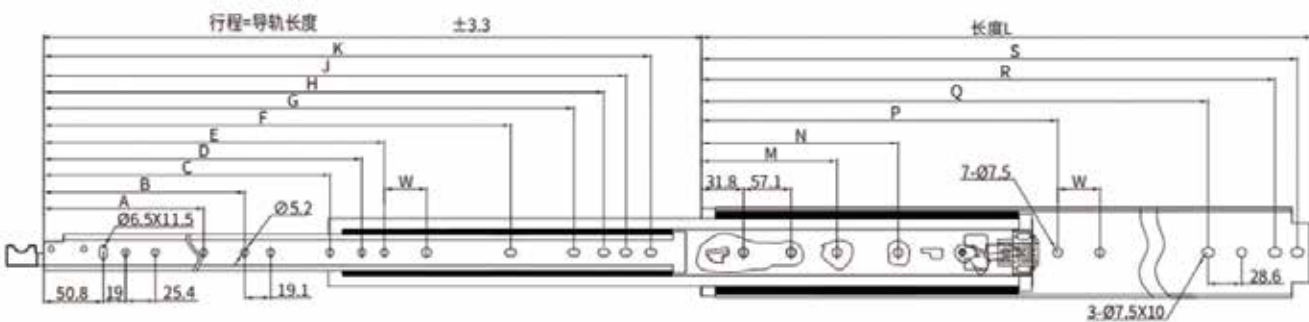

封蓝处理
表面经过精密封蓝处理氧化，经久耐用，防止生锈。
The surface is treated with high-precision blue electroplating, high oxidation resistance, durable wear, super anti-rust



04

UNDERMOUNT DRAWER SLIDE

C-11

EUROPEAN-STYLE SOFT CLOSING FULL EXTENSION UNDERMOUNT SLIDE

Thickness range	1.0x1.0mm
Product length	250mm-550mm(10"-22")
Load capacity	20kg/14"
Life time	50000 times
Feature	half extension, tool-less height adj.(0-3mm)



X:The drawer board thickness

Product	Specification	Drawer length	Inside depth (outside minimum)	Inside depth (inside minimum)
11-260	10"	250	270	270+X
11-310	12"	300	320	320+X
11-360	14"	350	370	370+X
11-410	16"	400	420	420+X
11-460	18"	450	470	470+X
11-510	20"	500	520	520+X
11-560	22"	550	570	570+X

INSTALLATION SIZE DIAGRAM

explain	Outside drawer	Inside drawer
W: Internal cabinet width		
L: Drawer length		
NL: Slide length		
DL: Internal cabinet depth		
X: The drawer board thickness		

SCREW POSITIONS OF THE SLIDES

Cabinet edge

250mm

300mm

350mm

400mm

450mm

500mm

550mm

37 37 96

W

-1.0 W-42 +0

min 6

max 9

min 34

12

(*max 19)
max 16

The asterisk number is the installation size of 19mm thickness drawer slide

7

21

11

10

6

21

10

10

6

21

10

L

A

B

21

L (mm)	A (mm)	B (mm)
250	185	205
300	235	255
350	285	305
400	335	355
450	385	405
500	435	455
550	485	505

Grup screw

European standard screw

P head screw

37

37

Outside drawer

Inside drawer

φ7

17

φ8

11

φ6

C-22
EUROPEAN-STYLE SOFT CLOSING FULL
EXTENSION UNDERMOUNT SLIDE

Thickness range	1.4x1.4mm
Product length	250mm-550mm(10"-22")
Load capacity	25kg/18"
Life time	50000 times
Feature	half extension, tool-less height adj.(0-3mm)



X:The drawer board thickness

Product	Specification	Drawer length	Inside depth (outside minimum)	Inside depth (inside minimum)
22-260	10"	250	270	270+X
22-310	12"	300	320	320+X
22-360	14"	350	370	370+X
22-410	16"	400	420	420+X
22-460	18"	450	470	470+X
22-510	20"	500	520	520+X
22-560	22"	550	570	570+X

INSTALLATION SIZE DIAGRAM

explain	Outside drawer	Inside drawer
W: Internal cabinet width		
L: Drawer length		
NL: Slide length		
DL: Internal cabinet depth		
X: The drawer board thickness		

SCREW POSITIONS OF THE SLIDES

The asterisk number is the installation size of 19mm thickness drawer slide

L (mm)	A (mm)	B (mm)
250	185	205
300	235	255
350	285	305
400	335	355
450	385	405
500	435	455
550	485	505

Outside drawer Inside drawer

C-102

EUROPEAN-STYLE PUSH OPEN FULL EXTENSION UNDERMOUNT SLIDE

Thickness range	1.4x1.4mm
Product length	250mm-550mm(10"-22")
Load capacity	25kg/18"
Life time	50000 times
Feature	half extension, tool-less height adj.(0-3mm)



X:The drawer board thickness

Product	Specification	Drawer length	Inside depth (outside minimum)	Inside depth (inside minimum)
102-260	10"	250	270	270+X
102-310	12"	300	320	320+X
102-360	14"	350	370	370+X
102-410	16"	400	420	420+X
102-460	18"	450	470	470+X
102-510	20"	500	520	520+X
102-560	22"	550	570	570+X

INSTALLATION SIZE DIAGRAM

explain	Outside drawer	Inside drawer
W: Internal cabinet width		
L: Drawer length		
NL: Slide length		
DL: Internal cabinet depth		
X: The drawer board thickness		

SCREW POSITIONS OF THE SLIDES

Cabinet edge

250mm

300mm

350mm

400mm

450mm

500mm

550mm

37 37 96

W

-1.0 W-42 +0

min 6

max 9

(*max 19)
max 16

min 34

12

The asterisk number is the installation size of 19mm thickness drawer slide

7

21

11

10

10

6

21

10

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10

6

21

10


6

C-66

AMERICAN-STYLE SOFT CLOSING FULL EXTENSION UNDERMOUNT SLIDE

(LMAX DRAWER SLIDE THICKNESS: 16MM/19MM,WITH LOCKING BRACKETS)

Thickness range	1.8x1.5x1.0mm
Product length	229mm-533mm(9"-21")
Load capacity	34kg/18"
Life time	50000 times
Feature	half extension, quietly operation, tool-less height adj.(0-3mm)

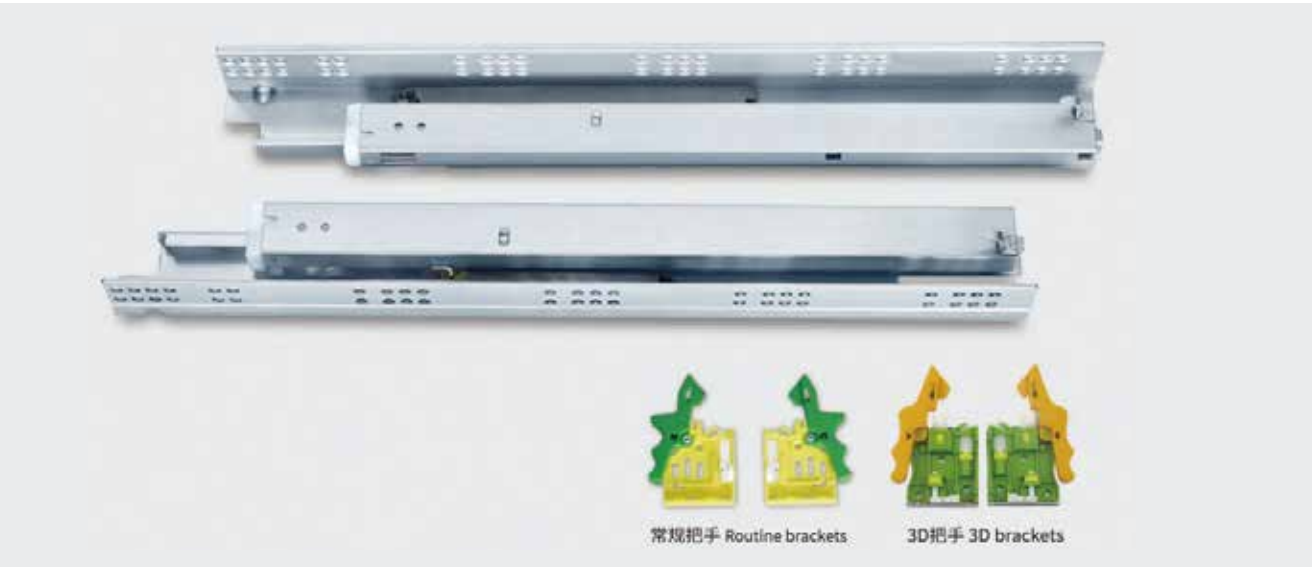

X:The drawer board thickness

Product	66-229	66-305	66-38	66-457	66-553
Specification	9"	12"	15"	18"	21"
Drawer length	229	305	381	457	533
Inside the cabinet depth (outside minimum)	285	342	418	494	570
Inside the cabinet depth (outside maximum)	300	367	443	519	595
Inside the cabinet depth (inside minimum)	285+X	342+X	418+X	494+X	570+X
Inside the cabinet depth (inside maximum)	300+X	367+X	443+X	519+X	595+X

INSTALLATION SIZE DIAGRAM

explain	Outside drawer	Inside drawer
W: Internal cabinet width		
L: Drawer length		
NL: Slide length		
DL: Internal cabinet depth		
X: The drawer board thickness		

SCREW POSITIONS OF THE SLIDES

柜子前沿 Cabinet edge 229 37 A 305 37 381 37 B 457 37 B 533 37 A B		W=the width of inner drawer max 6 min 6 max 11 min 11 max 16(*max 19) min 27.5 12 37 21(*24.5) The asterisk number is the installation size of 19mm thickness drawer slide																																
金属后托 (选配) Rear mounting bracket for face frame cabinets 塑料后托 (选配) Adjustable plug-in socket																																		
<table><tr><td> Group screw </td><td> European standard screw </td><td> X head screw </td><td> Outside drawer 37 </td><td> Inside drawer 37 </td></tr></table>		Group screw	European standard screw	X head screw	Outside drawer 37	Inside drawer 37	<table><tr><th rowspan="2">Assembling dimensions</th><th rowspan="2">Drawer length</th><th colspan="2">Hole distance size (mm)</th></tr><tr><th>A</th><th>B</th></tr><tr><td>XL-66-229</td><td>229</td><td>128</td><td></td></tr><tr><td>XL-66-305</td><td>305</td><td>224</td><td></td></tr><tr><td>XL-66-381</td><td>381</td><td>224</td><td>96</td></tr><tr><td>XL-66-457</td><td>457</td><td>224</td><td>192</td></tr><tr><td>XL-66-533</td><td>533</td><td>224</td><td>256</td></tr></table>		Assembling dimensions	Drawer length	Hole distance size (mm)		A	B	XL-66-229	229	128		XL-66-305	305	224		XL-66-381	381	224	96	XL-66-457	457	224	192	XL-66-533	533	224	256
Group screw	European standard screw	X head screw	Outside drawer 37	Inside drawer 37																														
Assembling dimensions	Drawer length	Hole distance size (mm)																																
		A	B																															
XL-66-229	229	128																																
XL-66-305	305	224																																
XL-66-381	381	224	96																															
XL-66-457	457	224	192																															
XL-66-533	533	224	256																															

C-77

AMERICAN-STYLE SOFT CLOSING FULL EXTENSION UNDERMOUNT SLIDE

(MAX DRAWER SLIDE THICKNESS: 16MM/L9MM,WITH LOCKING PIN AND DAMPER)

Thickness range	1.8x1.5x1.0mm
Product length	229mm-533mm(9"-21")
Load capacity	34kg/18"
Life time	50000 times
Feature	half extension, quietly operation, tool-less height adj.(0-3mm)











X:The drawer board thickness

Product	77-229	77-305	77-381	77-457	77-553
Specification	9"	12"	15"	18"	21"
Drawer length	229	305	381	457	533
Inside the cabinet depth (outside minimum)	285	342	418	494	570
Inside the cabinet depth (outside maximum)	300	367	443	519	595
Inside the cabinet depth (inside minimum)	285+X	342+X	418+X	494+X	570+X
Inside the cabinet depth (inside maximum)	300+X	367+X	443+X	519+X	595+X

INSTALLATION SIZE DIAGRAM

explain	Outside drawer	Inside drawer
W: Internal cabinet width		
L: Drawer length		
NL: Slide length		
DL: Internal cabinet depth		
X: The drawer board thickness		

SCREW POSITIONS OF THE SLIDES

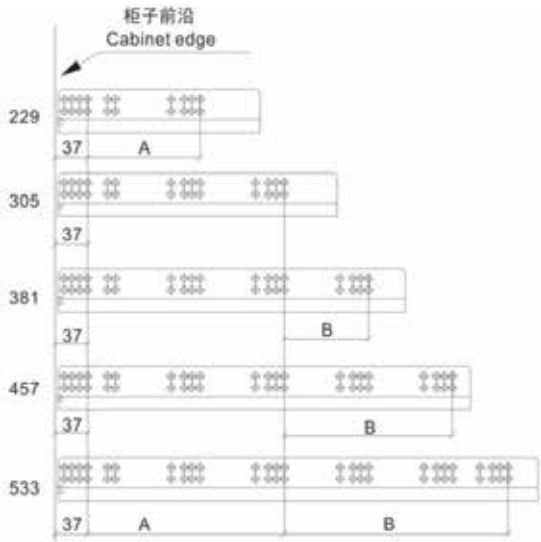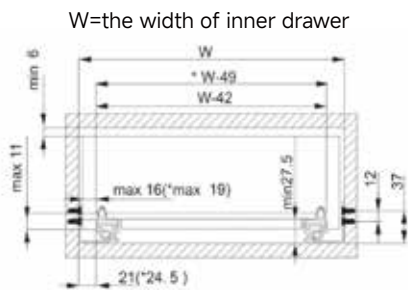																																															
		The asterisk number is the installation size of 19mm thickness drawer slide																																													
																																															
																																															
金屬后托 (选配) Rear mounting bracket for face frame cabinets		塑料后托 (选配) Adjustable plug-in socket																																													
<table><tr><th rowspan="2">Assembling dimensions</th><th rowspan="2">Drawer length</th><th colspan="2">Hole distance size (mm)</th></tr><tr><th>A</th><th>B</th></tr><tr><td>XL-77-229</td><td>229</td><td>128</td><td></td></tr><tr><td>XL-77-305</td><td>305</td><td>224</td><td></td></tr><tr><td>XL-77-381</td><td>381</td><td>224</td><td>96</td></tr><tr><td>XL-77-457</td><td>457</td><td>224</td><td>192</td></tr><tr><td>XL-77-533</td><td>533</td><td>224</td><td>256</td></tr></table>		Assembling dimensions	Drawer length	Hole distance size (mm)		A	B	XL-77-229	229	128		XL-77-305	305	224		XL-77-381	381	224	96	XL-77-457	457	224	192	XL-77-533	533	224	256	<table><tr><th>L (mm)</th><th>A (mm)</th><th>B (mm)</th></tr><tr><td>229</td><td>162.5</td><td>173</td></tr><tr><td>305</td><td>232.5</td><td>243</td></tr><tr><td>381</td><td>286.5</td><td>297.5</td></tr><tr><td>457</td><td>337</td><td>367</td></tr><tr><td>533</td><td>379</td><td>446.5</td></tr></table>		L (mm)	A (mm)	B (mm)	229	162.5	173	305	232.5	243	381	286.5	297.5	457	337	367	533	379	446.5
Assembling dimensions	Drawer length			Hole distance size (mm)																																											
		A	B																																												
XL-77-229	229	128																																													
XL-77-305	305	224																																													
XL-77-381	381	224	96																																												
XL-77-457	457	224	192																																												
XL-77-533	533	224	256																																												
L (mm)	A (mm)	B (mm)																																													
229	162.5	173																																													
305	232.5	243																																													
381	286.5	297.5																																													
457	337	367																																													
533	379	446.5																																													
 Grup screw 	 European standard screw 	 P head screw 	 Outside drawer  Inside drawer																																												

C-88

EUROPEAN-STYLE SOFT CLOSING FULL EXTENSION UNDERMOUNT SLIDE

(MAX DRAWER SLIDE THICKNESS: 16MM/19MM,WITH LOCKING BRACKETS)

Thickness range	1.8x1.5x1.0mm
Product length	250mm-600mm(10"-24")
Load capacity	34kg/18"
Life time	50000 times
Feature	half extension, quietly operation, tool-less height adj.(0-3mm)



X:The drawer board thickness

Product	Nominal length	Drawer length	Inside the cabinet depth (outside minimum)	Inside the cabinet depth (inside minimum)
88-250	250	240	260	260+X
88-300	300	290	310	310+X
88-350	350	340	360	360+X
88-400	400	390	410	410+X
88-450	450	440	460	460+X
88-500	500	490	510	510+X
88-550	550	540	560	560+X

INSTALLATION SIZE DIAGRAM

explain	Outside drawer	Inside drawer
W: Internal cabinet width		
L: Drawer length		
NL: Slide length		
DL: Internal cabinet depth		
X: The drawer board thickness		

SCREW POSITIONS OF THE SLIDES

W=柜内宽度 W=the width of internal drawer	
带*为侧板19mm滑轨安装尺寸 The asterisk number is the installation size of 19mm thickness drawer slide	
Screw requirements	
平头螺丝 Countersunk screw	欧标螺丝 Euro screw
P头螺丝 Panhead screw	

C-108

EUROPEAN-STYLE PUSH OPEN FULL EXTENSION UNDERMOUNT SLIDE

(MAX DRAWER SLIDE THICKNESS:16MM/19MM,WITH LOCKING BRACKETS)

Thickness range	1.8x1.5x1.0mm
Product length	250mm-600mm(10"-24")
Load capacity	34kg/18"
Life time	50000 times
Feature	half extension, quietly operation, tool-less height adj.(0-3mm)



X:The drawer board thickness

Product	Nominal length	Drawer length	Inside the cabinet depth (outside minimum)	Inside the cabinet depth (inside minimum)
108-250	250	240	260	260+X
108-300	300	290	310	310+X
108-350	350	340	360	360+X
108-400	400	390	410	410+X
108-450	450	440	460	460+X
108-500	500	490	510	510+X
108-550	550	540	560	560+X

INSTALLATION SIZE DIAGRAM

explain	Outside drawer	Inside drawer
W: Internal cabinet width		
L: Drawer length		
NL: Slide length		
DL: Internal cabinet depth		
X: The drawer board thickness		

SCREW POSITIONS OF THE SLIDES

C-99
EUROPEAN-STYLE PUSH OPEN FULL EXTENSION UNDERMOUNT SLIDE
(MAX DRAWER SLIDE THICKNESS:16MM/19MM,WITH LOCKING BRACKETS)

Table with 2 columns: Feature, Value. Rows include Thickness range (1.8x1.5x1.0mm), Product length (250mm-600mm), Load capacity (34kg/18"), Life time (50000 times), and Feature (half extension, quietly operation, tool-less height adj.).




X:The drawer board thickness

Table with 5 columns: Product, Nominal length, Drawer length, Inside the cabinet depth (outside minimum), Inside the cabinet depth (inside minimum). Rows list products from 99-250 to 99-550 with corresponding dimensions.

INSTALLATION SIZE DIAGRAM

Table with 3 columns: explain, Outside drawer, Inside drawer. Rows define W (Internal cabinet width), L (Drawer length), NL (Slide length), DL (Internal cabinet depth), and X (The drawer board thickness) with corresponding diagrams.




SCREW POSITIONS OF THE SLIDES

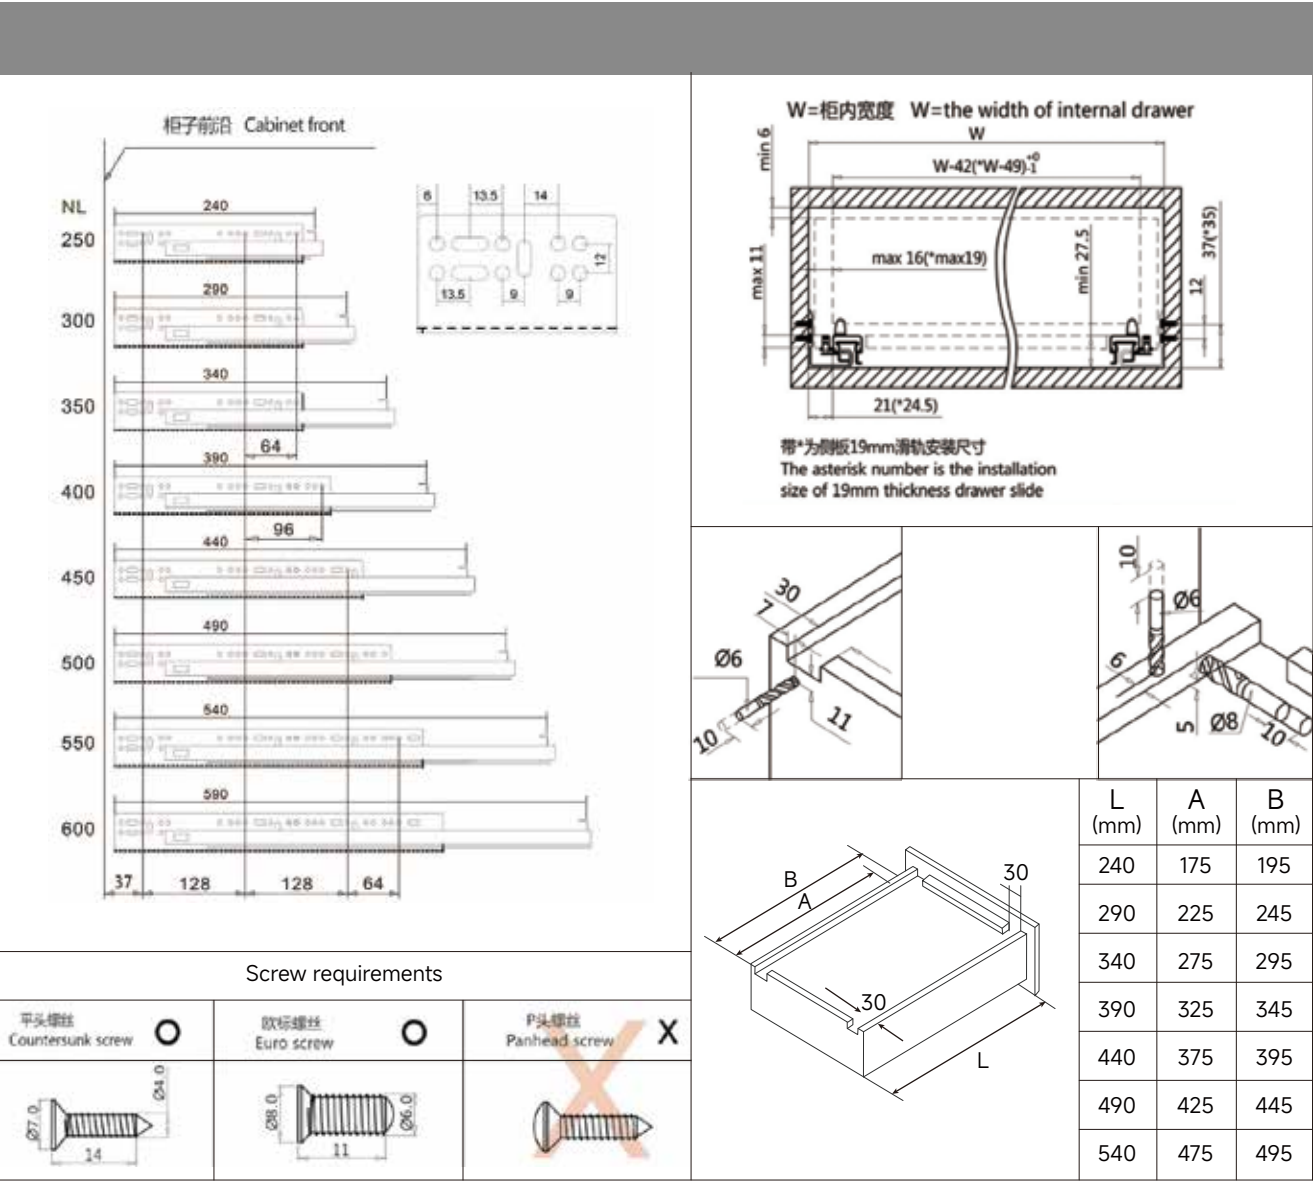

05

HINGES SERIES

INSTALLATION METHOD OF THE PRODUCT

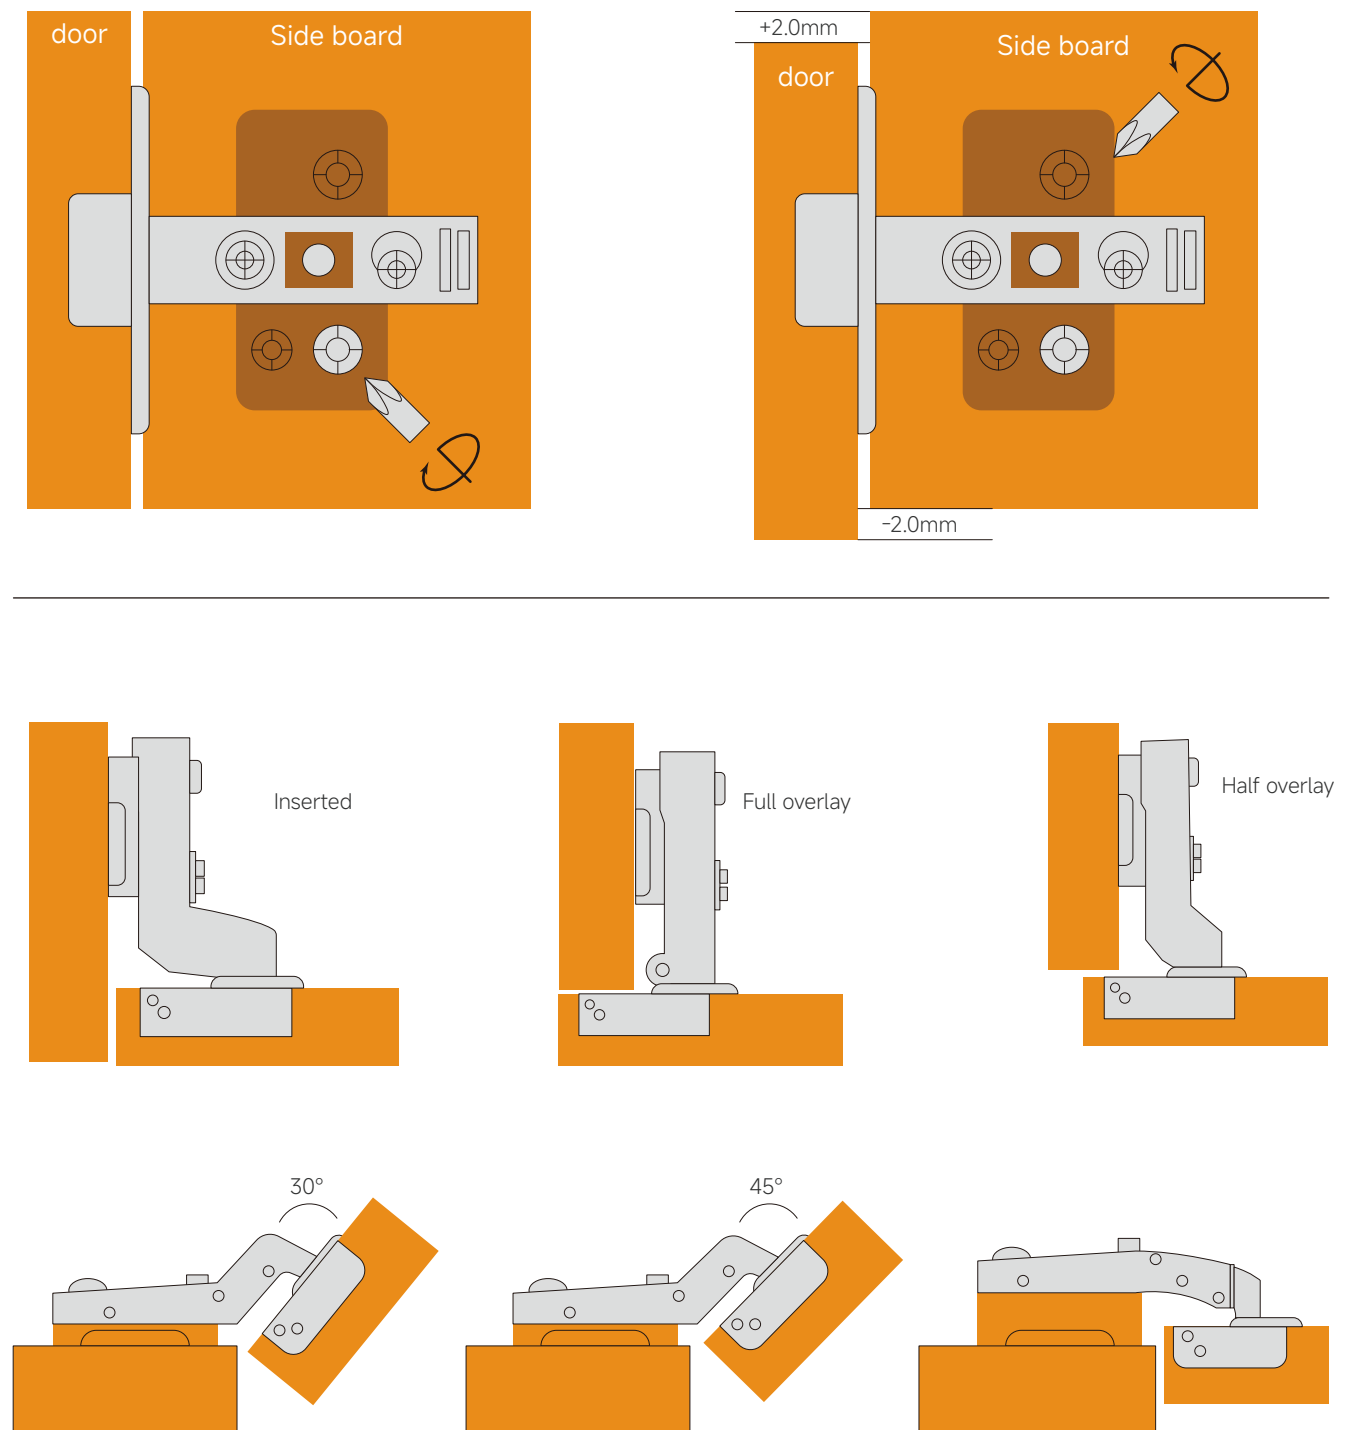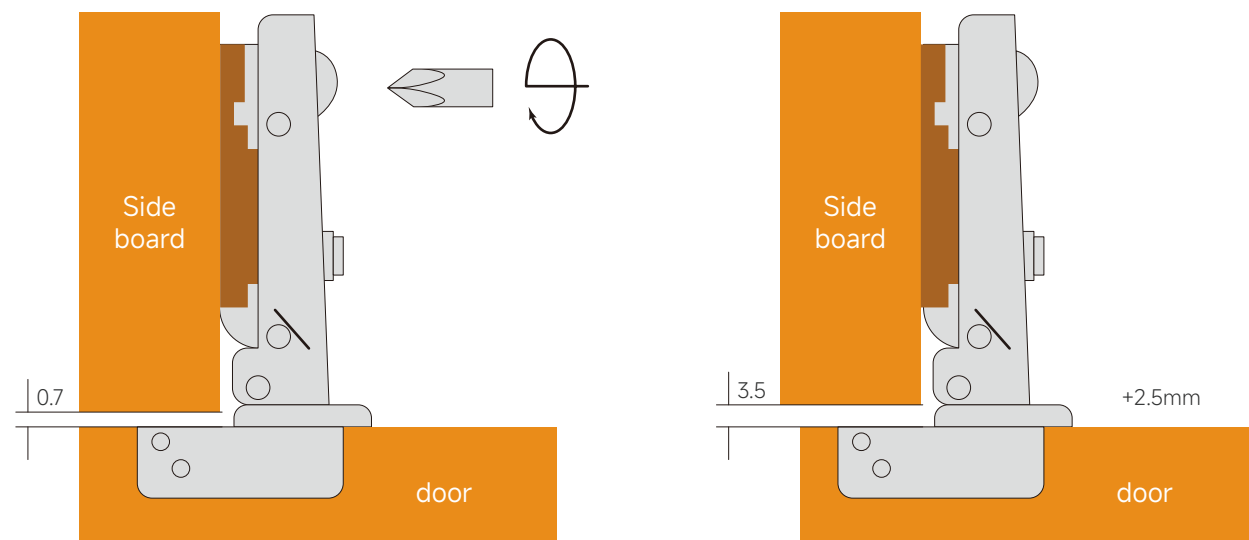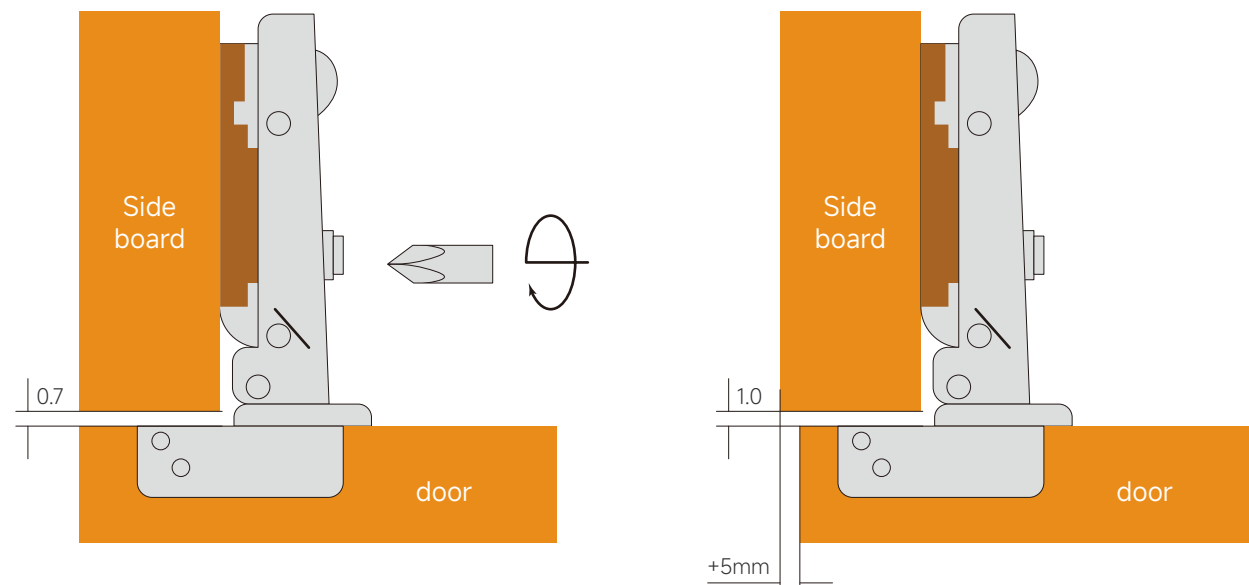

GD-261



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	110° two sections force	35mm/11.5mm

GD-265



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	110° two sections force	35mm/11.5mm

GD-368B TWO HOLES/FOUR HOLES

GX-367B




Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	110° two sections force	35mm/11.5mm

GD-363



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	110°one sections force	35mm/11.5mm

GD-364

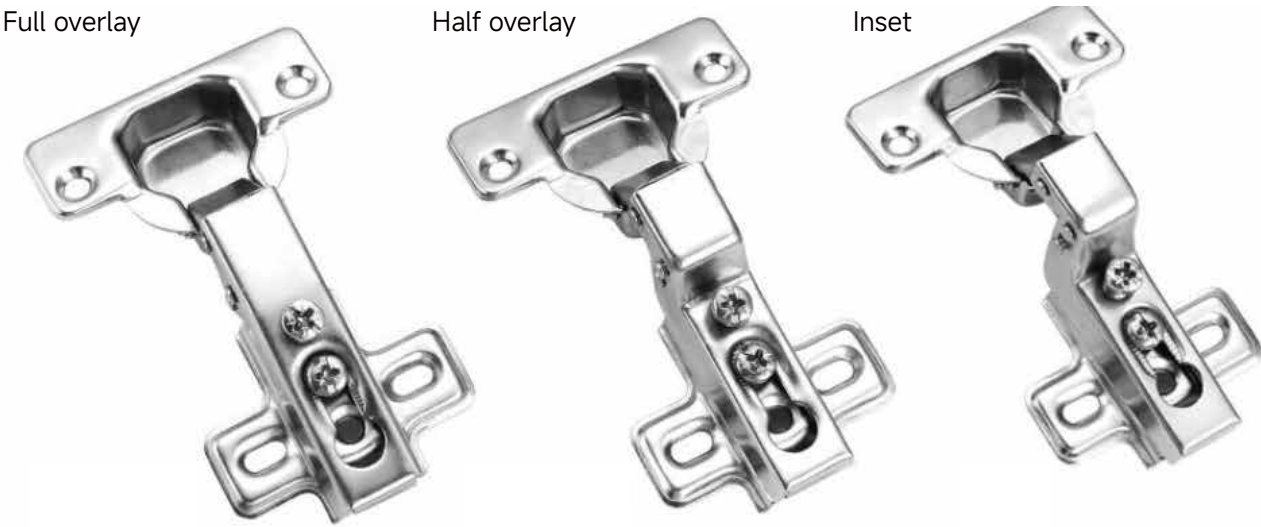

Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	110° two sections force	35mm/11.5mm

GD-601



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	95° one sections force	35mm/11.5mm

GD-8188



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	95° two sections force	35mm/11.5mm

GD-602



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	110° one sections force	35mm/11.5mm

GD-505

Full overlay

Half overlay

Inset



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	95 ° one sections force	35mm/11.5mm

GD-368N TWO HOLES/FOUR HOLES

Full overlay

Full overlay



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	95° one sections force	35mm/11.5mm

GD-662

Full overlay

Half overlay

Back display



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	95 ° one sections force	35mm/11.5mm

GD-403

Full overlay


Half overlay

Inset



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	95° one sections force	40mm/11.5mm

GD-3D

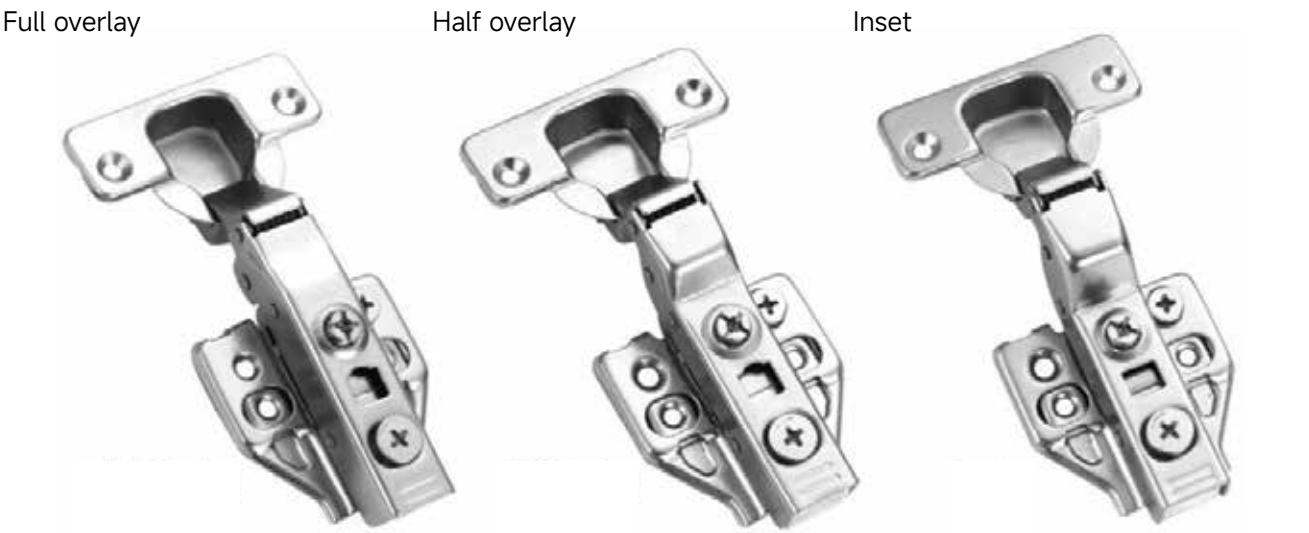

Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	95 ° one sections force	35mm/11.5mm

GD-F30°



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	-30°/-45° two sections force	35mm/11.5mm

GD-F45°



GD-30°

GD-45°

GD-90°



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	30°/45°/90° two sections force	35mm/11.5mm

GD-135°



Material	Opening angle	Diameter/depth of hinge cup
Cold rolled steel	135°/165°one sections force	35mm/11.5mm

GD-165°

